

DATA SHEET

3VA66 1000A Frame Electronic Trip Circuit Breakers

With global certifications including UL489, CSA22.2 and IEC 60947-2.
Find out more at **usa.siemens.com/3VA**

SIEMENS

Interrupting Ratings for 3VA66

Interrupting Class	Breaker Type	RMS Symmetrical Amperes (kA)				
		Volts AC (50/60 Hz)				
		240	480Y/277V	480	600Y/347V	600
M	MMNAE	100	35	35	25	25
H	HMNAE	150	65	65	35	35
C	CMNAE	200	100	100	50	50

Dimensions

Shipping Weight

Breaker	Poles	W in. (mm)	H in. (mm)	D in. (mm)	lbs.	kg
3VA66	3	8.3 (210)	12.5 (318)	5.8 (147)	29.4	13.4
3VA66	4	11.1 (280)	12.5 (318)	5.8 (147)	37.4	17.0

Enclosures (3-pole only)

NEMA Type	Catalog Number
1 Surface	**3VAE8001S**
1 Flush	**3VAE8001F**
3R	**3VAE8003R**
12	**3VAE80012**
4X (304)	**3VAE8004X**
4X (316)	**3VAE8004X316**
Neutral	**HN656ACB**
200% Neutral	**HN678ACB**

Connections for 75C wire for 3VA66

Type	Minimum cable size	Maximum cable size	Part Number (kit of 3 lugs)	Part Number (kit of 4 lugs)
Aluminum body lug, 2 cables (Cu/Al cable)	4/0	600 kcmil	**3VA9573-0JB23**①	**3VA9574-0JB23**①
Aluminum body lug, 2 cables (Cu/Al cable) with control wire tap	4/0	600 kcmil	**3VA9573-0JG23**①	**3VA9574-0JG23**①
Aluminum body lug, 2 cables (Cu/Al cable) with 1 extended terminal cover	400 kcmil	750 kcmil	**3VA9673-0JJ24**	**3VA9674-0JJ24**
Aluminum body lug, 2 cables (Cu/Al cable) with control wire tap and 1 extended terminal cover	400 kcmil	750 kcmil	**3VA9673-0JC24**	**3VA9674-0JC24**
Aluminum body lug, 3 cables (Cu/Al cable)	4/0	400 kcmil	**3VA9673-0JB32**①	**3VA9674-0JB32**①
Aluminum body lug, 3 cables (Cu/Al cable) with control wire tap	4/0	400 kcmil	**3VA9673-0JG32**①	**3VA9674-0JG32**①
Aluminum body lug, 3 cables (Cu/Al cable) with 1 extended terminal cover	500 kcmil	750 kcmil	**3VA9673-0JJ34**	**3VA9674-0JJ34**
Aluminum body lug, 3 cables (Cu/Al cable) with control wire tap and 1 extended terminal cover	500 kcmil	750 kcmil	**3VA9673-0JC34**	**3VA9674-0JC34**
Aluminum body lug, 4 cables (Cu/Al cable) with 1 extended terminal cover	4/0	500 kcmil	**3VA9673-0JJ43**②	**3VA9674-0JJ43**②
Aluminum body lug, 4 cables (Cu/Al cable) with control wire tap and 1 extended terminal cover	4/0	500 kcmil	**3VA9673-0JC43**	**3VA9674-0JC43**
Aluminum body lug, 4 cables (Cu/Al cable) with 1 extended terminal cover	4/0	600 kcmil	**3VA9673-0JJ44**	**3VA9674-0JJ44**
Aluminum body lug, 4 cables (Cu/Al cable) with control wire tap and 1 extended terminal cover	4/0	600 kcmil	**3VA9673-0JC44**	**3VA9674-0JC44**
Copper body lug, 3 cables (Cu/Al cable) with control wire tap	4/0	400 kcmil	**3VA9673-0JK32**	**3VA9674-0JK32**
Copper body lug, 4 cables (Cu/Al cable) with control wire tap and 1 extended terminal cover	4/0	500 kcmil	**3VA9673-0JL43**	**3VA9674-0JL43**

① 3VA55 and 3VA65 Meets requirements for 100% rated breakers up to 600A.
② Standard lug for the 800A 3VA55/65 and the 1000A 3VA66 will ship with the breaker from the factory for field installation when the breaker is ordered with a "6" in the 12th position.

Padlock Accessory

Description	Catalog Number
Padlock device for the 3VA66 breaker	**3VA9578-0LB10**

Applicable Standards:

- UL489 - Molded Case Circuit Breakers
- UL486A - Wire connectors and solderless lugs for use with copper
- UL486B- Wire connectors and solderless lugs for use with aluminum wire
- CSA-22.2 No. 5-13 - Molded Case Circuit Breakers, Molded case switches and circuit breaker enclosures
- EN 60947-1 AMD 2 - Molded case circuit breakers
- EN 60947-2 AMD 2 2013
- EN 50581 2012 - RoHS compliant
- All 3VA breakers are HACR rated per UL

3-series Electronic Trip Units

ETU320-LI, ETU330-LIG, ETU350-LSI


Cont. Amp	LI, LIG, LSI			LSI		LIG	LI, LIG, LSI 4P only
I_n (Amp)	I_r(Amp) (L)	t_{ld} (sec) (L)	I_i (Amp) (I)①	I_{sd}= xIr (Amp) (S)	t_{sd} (sec) (S)	I_g (Amp) (G)	I_N=xI_r (Amp)
1000	400 - 1000	0.5 - 17	1500 - 10000	1.5 - 10	0 - 0.4	200 - 1000	0.2 - 1.0

① I_i for ETU350 is fixed at the maximum level shown in table

ETU320

Parameters for EU320


The parameters are selected with the setting knob.
The diagram below shows an example of the possible selections with setting knob I_r.

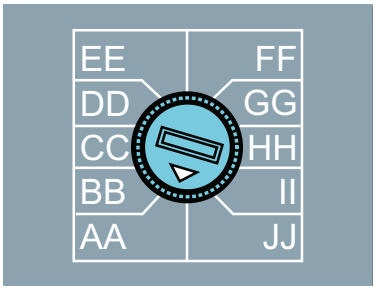


The values for the respective setting are listed in the tables below:

Electronic trip unit ETU320 LI

ETU320 LI 3-pole:

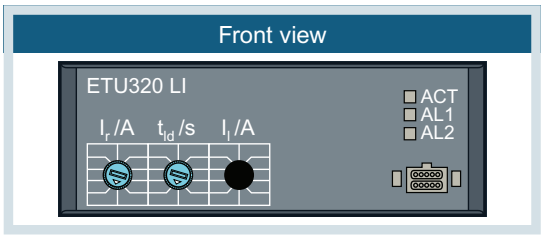

ETU320 LI 4-pole:

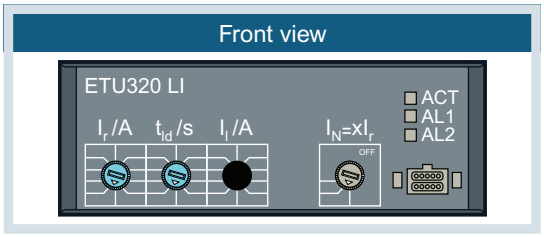

Current settings values – I_r

	Breaking capacity class	Rated current I_n [A]	Setting values I_r [A]									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	400	500	600	700	750	800	850	900	950	1000

Long-time delay setting values – t_{ld}

	Breaking capacity class	Rated current I_n [A]	Setting values t_{ld} [s]									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	0.5	0.75	1	2	3	5	8	10	14	17

Instantaneous pickup setting values – I_i

	Breaking capacity class	Rated current I_n [A]	Setting values I_i [A]									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	1500	2000	2500	3000	4000	5000	6000	8000	9000	10000


Neutral current setting values – I_N

	Breaking capacity class	Rated current I_n [A]	Setting values I_N [A] I_N = x I_r									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	0.5	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

ETU330

Parameters for ETU330


The parameters are selected with the setting knob. The diagram below shows an example of the possible selections with setting knob I_r.

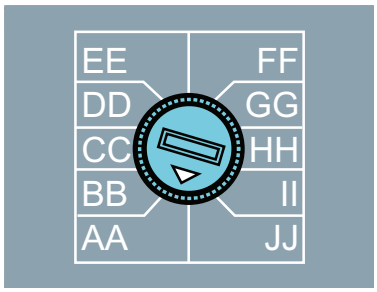


The values for the respective setting are listed in the tables below:

Electronic trip unit ETU330 LIG

ETU330 LIG 3-pole:

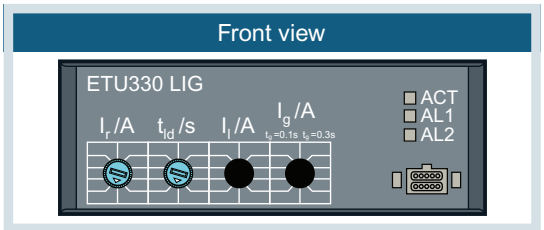

ETU330 LIG 4-pole:

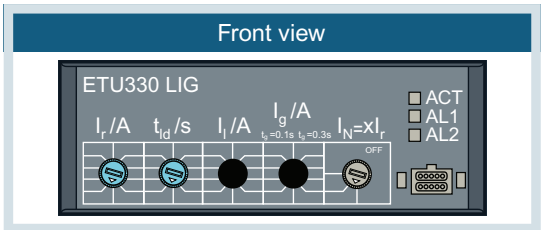

Current settings values – I_r

	Breaking capacity class	Rated current I_n [A]	Setting values I_r [A]									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	400	500	600	700	750	800	850	900	950	1000

Long-time delay setting values – t_{ld}

	Breaking capacity class	Rated current I_n [A]	Setting values t_{ld} [s]									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	0.5	0.75	1	2	3	5	8	10	14	17

Instantaneous pickup setting values – I_i

	Breaking capacity class	Rated current I_n [A]	Setting values I_i [A]									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	1500	2000	2500	3000	4000	5000	6000	8000	9000	10000

Ground fault pickup setting values – I_g

	Breaking capacity class	Rated current I_n [A]	Setting values I_g [A]									
			t_g = 0.1 s					t_g = 0.3 s				
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	200	400	600	800	1000	200	400	600	800	1000


Neutral current setting values – I_N

	Breaking capacity class	Rated current I_n [A]	Setting values I_N [A]									
			I_N = x I_r									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	0.5	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

ETU350

Parameters for ETU350


The parameters are selected with the setting knob.
The diagram below shows an example of the possible selections with setting knob I_r.

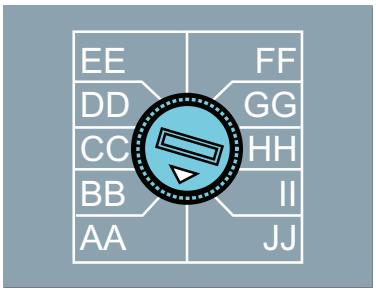


The values for the respective setting are listed in the tables below:

Electronic trip unit ETU350 LSI

ETU350 LSI 3-pole:

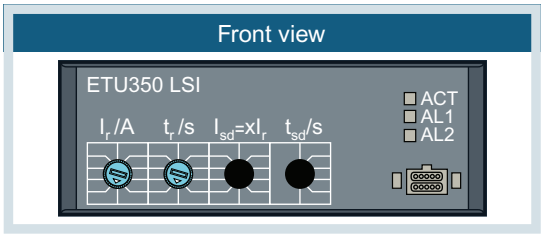

ETU350 LSI 4-pole:

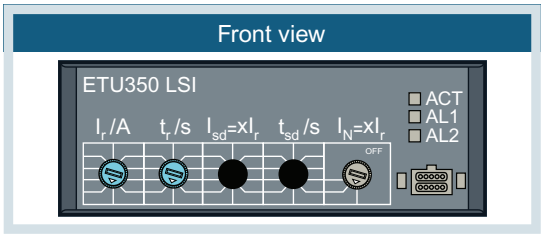

Current settings values – I_r

	Breaking capacity class	Rated current I_n [A]	Setting values I_r [A]									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	400	500	600	700	750	800	850	900	950	1000

Long-time delay setting values – t_{ld}

	Breaking capacity class	Rated current I_n [A]	Setting values t_{ld} [s]									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	0.5	0.75	1	2	3	5	8	10	14	17

Instantaneous pickup setting values – I_i

	Breaking capacity class	Rated current I_n [A]	Fixed setting values I_i	
			x I_n	[A]
3VA6610	M / H / C	1000	10	10000

Short-time pickup setting values – I_{sd}

	Breaking capacity class	Rated current I_n [A]	Setting values I_{sd} I_{sd} = x I_r									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	1.5	2	2.5	3	3.5	4	5	6	8	10

Short-time delay setting values – t_{sd}

	Breaking capacity class	Rated current I_n [A]	Setting values t_{sd} [s]									
			Fixed delay					I^2t function				
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	0	0	0	0	0	0.08	0.15	0.22	0.3	0.4

Neutral current setting values – I_N

	Breaking capacity class	Rated current I_n [A]	Setting values I_N I_N = x I_r									
			AA	BB	CC	DD	EE	FF	GG	HH	II	JJ
3VA6610	M / H / C	1000	0.5	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

5-series and 8-series Electronic Trip Units


Parameter input via display unit


Parameters are set via the display unit and its buttons. This functionality is available, however, only if a separate, dedicated power supply is connected to the molded case circuit breaker or if a current flow is more than 20% of L_n in one of the 3 phases. Alternatively, temporary power can be supplied with one of the available test devices: TD300 (3VA9977-0MA10) or TD500 (3VA9977-0MB10) in order to make adjustments before the equipment is fully installed and powered up.

ETU550-LSI, ETU556 LSI(A), ETU560-LSIG, ETU820-LI, ETU856 LSI(A), ETU860-LSIG

Cont. Amp	LI, LIG, LSI, LSIG, LSI(G)			LSI, LSIG, LSI(G)		LIG, LSIG, LSI(G)		LSI 3P with External CT	LI, LIG, LSI, LSIG, LSI(G) 4P only
I_n (Amp)	I_r(Amp) (L)③	t_{id} (sec) (L)	I_i (Amp) (I)	I_{sd} (Amp) (S)	t_{sd} (sec) (S)	I_g (Amp) (G)	t_g (G)	I_N=xI_r (Amp)	I_N (Amp)
1000	400 - 1000	0.5 - 25	1500 - 10000	600 - 10000	0.05 - 0.5	200 - 1000	0.05 - 0.8	200 - 1600	200 - 1000

③ Adjustable in steps of 1A.

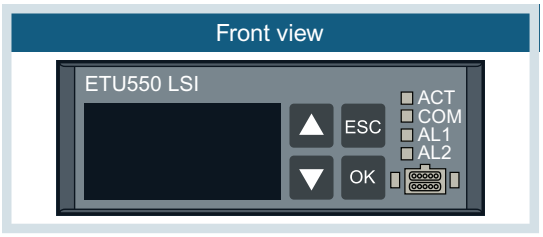

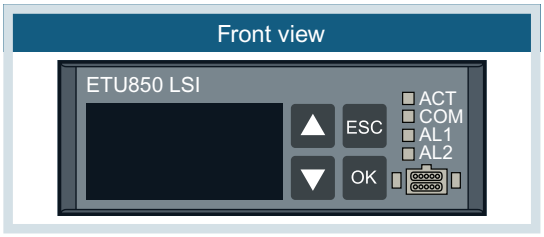

Catalog Numbering Logic

3VA	6	6	10	–	5	HL	3	2		0	A	A0

Trip Unit Protection Functions

3VA6		L	S	I	G	N	LCD	com.	measurement values	
ETU320 LI	MCCB	adj		adj		0%/50%/100%				HL
ETU330 LIG	MCCB	adj		adj	adj	0%/50%/100%				HM
ETU350 LSI	MCCB	adj	adj	fix		0%/50%/100%				HN
ETU550 LSI	MCCB	adj	adj	adj		20/40%...100/160%	yes	yes	standard	JP
ETU556 LSI(G)	MCCB	adj	adj	adj	alarm	20/40%...100/160%	yes	yes	standard	JT
ETU560 LSIG	MCCB	adj	adj	adj	adj	20/40%...100/160%	yes	yes	standard	JQ
ETU820 LI	MCCB	adj		adj		20/40%...100/160%	yes	yes	advanced	KL
ETU830 LIG	MCCB	adj		adj	adj	20/40%...100/160%	yes	yes	advanced	KM
ETU850LSI	MCCB	adj	adj	adj		20/40%...100/160%	yes	yes	advanced	KP
ETU856 LSI(G)	MCCB	adj	adj	adj	alarm	20/40%...100/160%	yes	yes	advanced	KT
ETU860 LSIG	MCCB	adj	adj	adj	adj	20/40%...100/160%	yes	yes	advanced	KQ
ETU310M	MCP			adj						MS
MCS110	MCS			fix						BB

Internal Accessories

Auxiliary and Alarm Switches (Form C –> 1 NO and 1 NC)

Switch Type	Width	AC 50/ 60 Hz	DC	Catalog Number
Auxiliary Switch (AUX) HQ	1 slot	24 … 300V	24 … 250V	**3VA9978-0AA12**
Leading Changeover Switch (LCS) HQ				**3VA9978-0AA22**
Trip/Bell Alarm Switch (TAS) HQ				**3VA9978-0AB12**
Electronic Alarm (EAS) HQ electronic①				**3VA9978-0AB22**
Auxiliary Switch (AUX) HP	2 slots	24 … 600V	24 … 250V	**3VA9978-0AA11**
Leading Changeover Switch (LCS) HP				**3VA9978-0AA21**
Trip/Bell Alarm Switch (TAS) HP				**3VA9978-0AB11**
Electronic Alarm (EAS) HP①				—
Auxiliary Switch (AUX) HQ electronic	1 slot	24 … 300V	24 … 250V	**3VA9978-0AA13**
Leading Changeover Switch (LCS) HQ electronic				**3VA9978-0AA23**
Trip/Bell Alarm Switch (TAS) HQ electronic				**3VA9978-0AB13**
Electronic Alarm (EAS) HQ electronic①				**3VA9978-0AB23**

Shunt Trips


Type	VAC 50/60 Hz	VDC	Catalog Number (3 slots)
Shunt Trip Left (STL)	380 ... 600	—	**3VA9978-0BL20**
	—	12	**3VA9978-0BL10**
	24	24 ... 30	**3VA9978-0BL30**
	48 ... 60	48 ... 60	**3VA9978-0BL31**
	110 ... 127	110 ... 127	**3VA9978-0BL32**
	208 ... 277	220 ... 250	**3VA9978-0BL33**
Shunt Trip Flexible (STF)②	24	—	**3VA9978-0BA20**
	48 ... 60	—	**3VA9978-0BA21**
	110 ... 127	—	**3VA9978-0BA22**
	208 ... 277	—	**3VA9978-0BA23**
	380 ... 500	—	**3VA9978-0BA24**
	600	—	**3VA9978-0BA25**

Undervoltage Release

Undervoltage Release (UVR)	—	12	**3VA9978-0BB10**
	—	24	**3VA9978-0BB11**
	—	48	**3VA9978-0BB12**
	—	125 ... 127	**3VA9978-0BB14**
	—	250	**3VA9978-0BB16**
	24	—	**3VA9978-0BB20**
	120 ... 127	—	**3VA9978-0BB24**
	208 ... 230	—	**3VA9978-0BB25**
	440 ... 480	—	**3VA9978-0BB27**

Universal Release (Undervoltage and Shunt trip)

Universal Release (UNI)	—	12	**3VA9978-0BD11**
	—	24	**3VA9978-0BD12**
	—	48	**3VA9978-0BD13**

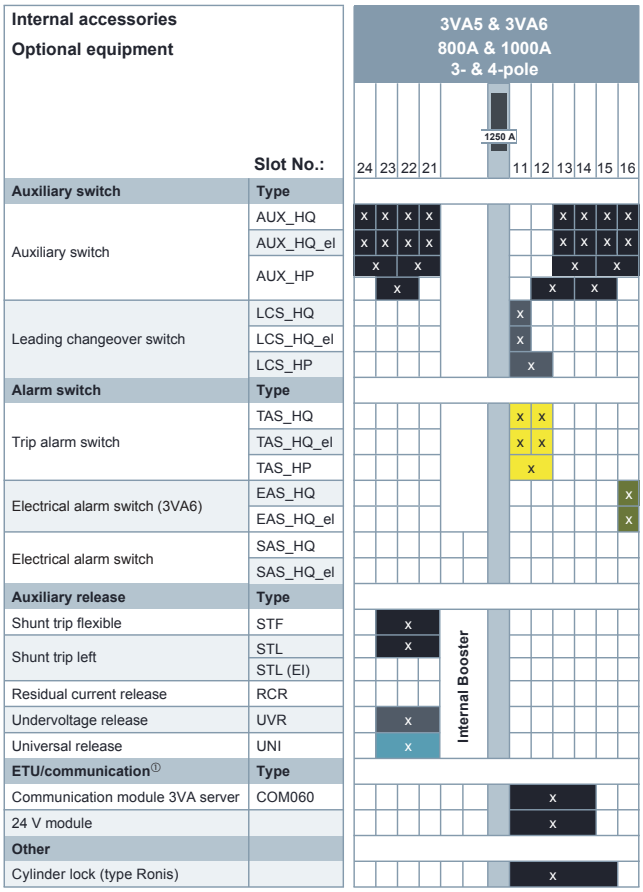

Time-delay Device for Undervoltage Release

Type	VAC 50/60 Hz	VDC	Delay Time	Catalog Number
Time-delay Device (mounted external to circuit breaker)	230	230	Fixed – 100ms minimum	**3VA9978-0BF22**
	—	24	Fixed – 100ms minimum	**3VA9978-0BF23**

① Use only with 3VA6.

② Shunt trip flexible can be used in the left pocket of the 3VA5 breakers. They can be used in the left or right pocket of the 3VA6 breakers.


Modules

	Type	For molded case circuit breakers / rated current		Part Number
		3VA61/62 150A/250 A	3VA63/64/65/66 400A/600A 800A/1000A	
	24 V Module ▪ 24 V DC ▪ For mounting in the right-hand accessories compartment of the 3VA6 ▪ Optional energy supply for the ETU, also includes continuous operation of the ETU display and the metering function of the ETU 8-series	√	—	**3VA9177-0TB50**
		—	√	**3VA9377-0TB50**
	COM060 communication module ▪ For mounting in the right-hand accessories compartment of the 3VA6 molded case circuit breaker (including ETU power supply) ▪ Communication with the COM800/COM100 breaker data server via the 3VA-line ▪ Not required for 3VA67-69 ▪ Including a T-Connector	√	—	**3VA9177-0TB10**
		—	√	**3VA9377-0TB10**
	Spare SLC adapter COM060, 24 V module accessory for: ▪ 3VA61/62 100/150/250	√	—	**3VA9187-0TB60**
	Spare SLC adapter COM060, 24 V module accessory for: ▪ 3VA63/64 400/600	—	√	**3VA9387-0TB60**


Breaker data server

	Type	Part Number
	COM800 breaker data server ▪ 2 terminating resistors ▪ Central communication module for connecting up to eight 3VA6 molded case circuit breakers via the 3VA-line ▪ Ethernet 10/100 Mbit/s interface ▪ Communication via Ethernet (Modbus TCP) ▪ Module slot for plugging on an optional PROFIBUS DP, PROFINET or RS485 module	**3VA9977-0TA10**
	COM100 breaker data server ▪ 2 terminating resistors ▪ Central communication module for connecting one 3VA6 molded case circuit breaker ▪ Ethernet 10/100 Mbit/s interface ▪ Communication via Ethernet (Modbus TCP) ▪ Module slot for plugging on an optional PROFIBUS DP, PROFINET or RS485 module	**3VA9977-0TA20**
	7KM PAC PROFIBUS DP expansion module ▪ The 7KM PAC PROFIBUS DP expansion module is used for connecting the COM800/COM100 breaker data server, and the 3VA molded case circuit breakers connected to it, to PROFIBUS DPV1 ▪ The 7KM PAC PROFIBUS DP expansion module provides the status and measured quantities of the 3VA molded case circuit breaker for the PROFIBUS DP master. It receives information (e.g. commands) from the PROFIBUS DP master, and forwards this information to the 3VA molded case circuit breaker	**7KM9300-0AB01-0AA0**
	7KM PAC Switched Ethernet PROFINET expansion module ▪ The 7KM PAC Switched Ethernet PROFINET expansion module is used to connect the COM800/COM100 breaker data server, and the connected 3VA molded case circuit breaker, to PROFINET via two Ethernet interfaces ▪ The 7KM PAC Switched Ethernet PROFINET expansion module provides the status and measured quantities of the 3VA molded case circuit breaker to PROFINET via the PROFINET IO, PROFIenergy and Modbus TCP protocols	**7KM9300-0AE01-0AA0**
	7KM PAC RS485 Modbus RTU expansion module ▪ The 7KM PAC RS485 Modbus expansion module is used to connect the COM800/COM100 breaker data server, and the 3VA molded case circuit breaker connected to it, to Modbus RTU ▪ The 7KM PAC RS485 Modbus expansion module provides the status and measured quantities of the 3VA molded case circuit breaker for the Modbus RTU master. It receives information (e.g. commands) from the Modbus RTU master, and forwards this information to the 3VA molded case circuit breaker	**7KM9300-0AM00-0AA0**

Accessories for Communication

	Type	Part Number
	T-Connector ▪ Spare part ▪ Provides spur line feeder to COM060 and loops to the next circuit breaker ▪ Includes a connection adapter for mounting on the 3VA6 breaker enclosure	**3VA9987-0TG10**
	DIN rail adapter For snapping the T-Connector onto a DIN rail	**3VA9987-0TG11**
	Preassembled T-Connector-to-T-Connector or T-Connector-to-COM800/ COM100 connecting cable ▪ 0.4 m long	**3VA9987-0TC10**
	▪ 1 m long	**3VA9987-0TC20**
	▪ 2 m long	**3VA9987-0TC30**
	▪ 4 m long	**3VA9987-0TC40**
	Preassembled connecting cable for extending the COM060-to-T-Connector spur line connection ▪ 0.4 m long	**3VA9987-0TF20**
	▪ 0.8 m long	**3VA9987-0TF10**
	Additional bus terminating resistors	**3VA9987-0TE10**
	Voltage tap to external N conductor Cable for connecting the neutral point for the metering function of the 8-Series ETU, length 1.5 m	**3VA9987-0UC10**
	External current transformer as straight-through transformer. Connection of an external current transformer for the N conductor for 3-pole 3VA6 molded case circuit breakers for 5-series and 8-series ETUs (ETU850, ETU856, ETU860), including connecting cable ▪ In = 25 ... 150A	**3VA9077-0NA10**
	▪ In = 160 ... 350 A	**3VA9177-0NA10**
	▪ In = 400 ... 630 A	**3VA9377-0NA10**
	▪ In = 600 ... 1000 A	**3VA9677-0NA10**
	DSP800 display ▪ For displaying the status, measured values and parameters of up to 8 3VA6 molded cases circuit breakers ▪ Connection to the COM800/COM100 via Ethernet for displaying information of the COM800/COM100 and the connected 3VA6 molded case circuit breaker	**3VA9977-0TD10**
	EFB300 ▪ External function box for connection to the ETU of the 3VA6 molded case circuit breaker ▪ 4 digital outputs for information output, 1 digital input ▪ ZSI functionality ▪ S0 interface ▪ Including cable 1.5 m in length	**3VA9977-0UA10**
	Connecting cable for EFB300 and MMB300. Spare part ▪ 1.5 m long	**3VA9987-0UB10**
	▪ 3.0 m long	**3VA9987-0UB20**
	▪ 3.0 m long for 3VA with EFB and RCD820	**3VA9987-0UB30**

Test devices

	Type	Part Number
	TD300 ■ Connection to the front interface of the ETU ■ Test device for activating the ETU and triggering a test trip	**3VA9977-0MA10**
	TD500 ■ Connection to the front interface of the ETU ■ Initiation of various test trips (LSING) ■ USB interface for connection of a PC using powerconfig ■ ETU parameterization ■ Including external power supply unit with adapter for Europe, UL and GB ■ Including connecting cable to the 3VA6 molded case circuit breaker	**3VA9977-0MB10**
	Spare part: External power supply for TD500 110 ... 240 V AC	**3VA9987-0MX10**
	Spare part: Cable for connecting to the TD500 to the 3VA6 molded case circuit breaker	**3VA9977-0MY10**

Maintenance Mode Box

	MMB300 ■ Realization of the NEC 240.87 (Arc Energy Reduction) -> personal protection during maintenance work ■ Switch into maintenance mode by changing the I- and G-protection to the lowest possible value through an external signal (e.g. door contact) ■ Available for all 3VA6 circuit breakers with electronic trip unit ■ Daisy chain up to 8 circuit breakers equipped with MMB300 ■ Additional digital output (D01) for ETU signals available ■ Capable of DIN rail mounting ■ Optional for 3VA67-69, DAS is integral on these frames ■ Includes cable 1.5m in length	**3VA9977-0UF10**



3VA66 1000A 3-Pole

Ordering Information

The catalog numbers listed here are for complete, non-interchangeable trip circuit breakers with nutkeepers on both line and load ends.

To include standard line and load lugs, shipped with the breaker for field installation, change the 12th digit to "6" (standard lugs are identified in the lug table and footnotes in this section of the SpeedFax). (For example, a 35KA @480VAC, 1000A, 3-pole, 3VA66 with lugs would be catalog number 3VA6610-5HL3**6**-0AA0). Alternate connectors can be ordered separately for field installation.

All 3VA6 circuit breakers are certified to UL 489 Supplement SB, are marked "Naval", and are suitable for use at 50C.

All 3VA66 electronic trip circuit breakers are UL listed for reverse feed applications.

3VA66 1000A, 3-pole Frame, Electronic Trip Unit

Continuous Ampere	M-Interrupting Class (MMNAE) Catalog Number	H-Interrupting Class (HMNAE) Catalog Number	C-Interrupting Class (CMNAE) Catalog Number
		ETU320 LI with dials	
1000	**3VA6610-5HL32-0AA0**	**3VA6610-6HL32-0AA0**	**3VA6610-7HL32-0AA0**
		ETU330 LIG with dials	
1000	**3VA6610-5HM32-0AA0**	**3VA6610-6HM32-0AA0**	**3VA6610-7HM32-0AA0**
		ETU350 LSI with dials – fixed instantaneous	
1000	**3VA6610-5HN32-0AA0**	**3VA6610-6HN32-0AA0**	**3VA6610-7HN32-0AA0**
		ETU550 LSI with LCD	
1000	**3VA6610-5JP32-0AA0**	**3VA6610-6JP32-0AA0**	**3VA6610-7JP32-0AA0**
		ETU556 LSI(G Alarm) with LCD	
1000	**3VA6610-5JT32-0AA0**	**3VA6610-6JT32-0AA0**	**3VA6610-7JT32-0AA0**
		ETU560 LSIG with LCD	
1000	**3VA6610-5JQ32-0AA0**	**3VA6610-6JQ32-0AA0**	**3VA6610-7JQ32-0AA0**
		ETU820 LI with LCD and Metering	
1000	**3VA6610-5KL32-0AA0**	**3VA6610-6KL32-0AA0**	**3VA6610-7KL32-0AA0**
		ETU856 LSI(G Alarm) with LCD and Metering	
1000	**3VA6610-5KT32-0AA0**	**3VA6610-6KT32-0AA0**	**3VA6610-7KT32-0AA0**
		ETU860 LSIG with LCD and Metering	
1000	**3VA6610-5KQ32-0AA0**	**3VA6610-6KQ32-0AA0**	**3VA6610-7KQ32-0AA0**



3VA66 1000A 4-Pole

3VA66 1000A, 4-pole Frame, Electronic Trip Unit

Continuous Ampere	M-Interrupting Class (MMNAE)	H-Interrupting Class (HMNAE)	C-Interrupting Class (CMNAE)
	Catalog Number	Catalog Number	Catalog Number
		ETU320 LI with dials	
1000	**3VA6610-5HL42-0AA0**	**3VA6610-6HL42-0AA0**	**3VA6610-7HL42-0AA0**
		ETU330 LIG with dials	
1000	**3VA6610-5HM42-0AA0**	**3VA6610-6HM42-0AA0**	**3VA6610-7HM42-0AA0**
		ETU350 LSI with dials – fixed instantaneous	
1000	**3VA6610-5HN42-0AA0**	**3VA6610-6HN42-0AA0**	**3VA6610-7HN42-0AA0**
		ETU550 LSI with LCD	
1000	**3VA6610-5JP42-0AA0**	**3VA6610-6JP42-0AA0**	**3VA6610-7JP42-0AA0**
		ETU556 LSI(G Alarm) with LCD	
1000	**3VA6610-5JT42-0AA0**	**3VA6610-6JT42-0AA0**	**3VA6610-7JT42-0AA0**
		ETU560 LSIG with LCD	
1000	**3VA6610-5JQ42-0AA0**	**3VA6610-6JQ42-0AA0**	**3VA6610-7JQ42-0AA0**
		ETU820 LI with LCD and Metering	
1000	**3VA6610-5KL42-0AA0**	**3VA6610-6KL42-0AA0**	**3VA6610-7KL42-0AA0**
		ETU856 LSI(G Alarm) with LCD and Metering	
1000	**3VA6610-5KT42-0AA0**	**3VA6610-6KT42-0AA0**	**3VA6610-7KT42-0AA0**
		ETU860 LSIG with LCD and Metering	
1000	**3VA6610-5KQ42-0AA0**	**3VA6610-6KQ42-0AA0**	**3VA6610-7KQ42-0AA0**

Notes

Legal Manufacturer

Siemens Industry, Inc.
3617 Parkway Lane
Peachtree Corners, GA 30092
United States of America

Siemens Technical Support: 1-800-333-7421
usa.siemens.com/3VA

Order No. CBDS-VA66E-0925

This document contains a general description of available technical options only, and its effectiveness will be subject to specific variables including field conditions and project parameters. Siemens does not make representations, warranties, or assurances as to the accuracy or completeness of the content contained herein. Siemens reserves the right to modify the technology and product specifications in its sole discretion without advance notice.

© 2025 by Siemens Industry, Inc.