SIEMENS

Product data sheet 6SL3000-0CE32-8AA0

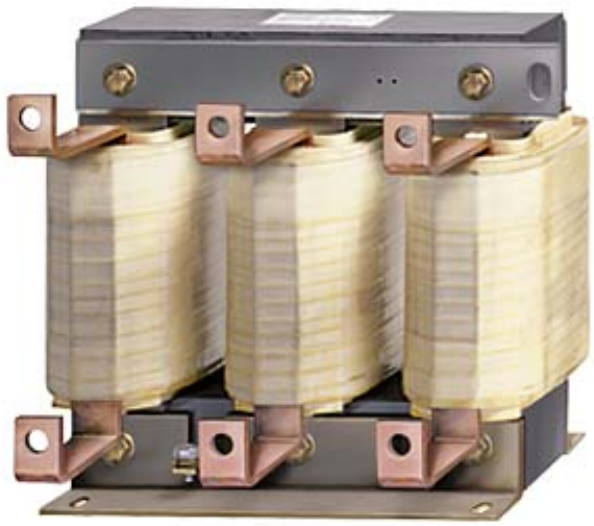

Fig. similar

SINAMICS/MICROMASTER PX LINE REACTOR
INPUT: 3AC 380-480 V,
50/60 HZ 278 A

Output current / rated value	278 A
Effective power loss	
• at 50 Hz	210 W
• at 60 Hz	250 W
Design of electrical connection / for PE conductor	M6 screw
Protection class IP	IP00
Width	270 mm
Height	248 mm
Depth	200 mm
Net weight	26 kg

Further information

Information and download center for Industry Automation and Drives

Technical documentation (Motion Control)

Industry Mall (online ordering system)

Service & Support (FAQs, manuals, operating instructions, certificates, characteristics, ...)

subject to modifications
© Copyright Siemens AG 2013

last change: Mar 1, 2013

subject to modifications
© Copyright Siemens AG 2013