SIEMENS

Data sheet 8US1213-4AH04

Device adapter MCCB, 3-pole, 590 A Busbar center-to-center spacing 60 mm for 3VA13/14/53/54/23/24/63/64 mm Contacting elements 300x140 mm for the adapter are provided



Model	
product brand name	SENTRON
Product designation	Device adapter
Design of the product	Accessories
Insulation voltage / rated value	800 V
Surge voltage resistance / rated value	6 kV
Operating current / at AC / rated value	590 A
Operating voltage / at AC / rated value	690 V
Dissipation	
Power loss [W]	87 W
Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	42 W
suitability for use	3VA13/14/53/54/23/24/63/64
Connections	
Type of connectable conductor cross-sections / for copper conductor / stranded	Tubular contacts
Mechanical Design	
Height	300 mm

Subject to change without notice
© Copyright Siemens

Width	140 mm
length	300 mm
Busbar center-to-center spacing	60 mm
net weight	2 500 g

Certificates

General Product Approval		Declaration of Conformity	Test Certificates		Shipping Approval
UL		EG-Konf.	Special Test Certificate	Miscellaneous	ABS

Shipping Approval		other
PRS	RINA	Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1213-4AH04

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/8US1213-4AH04

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1213-4AH04

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

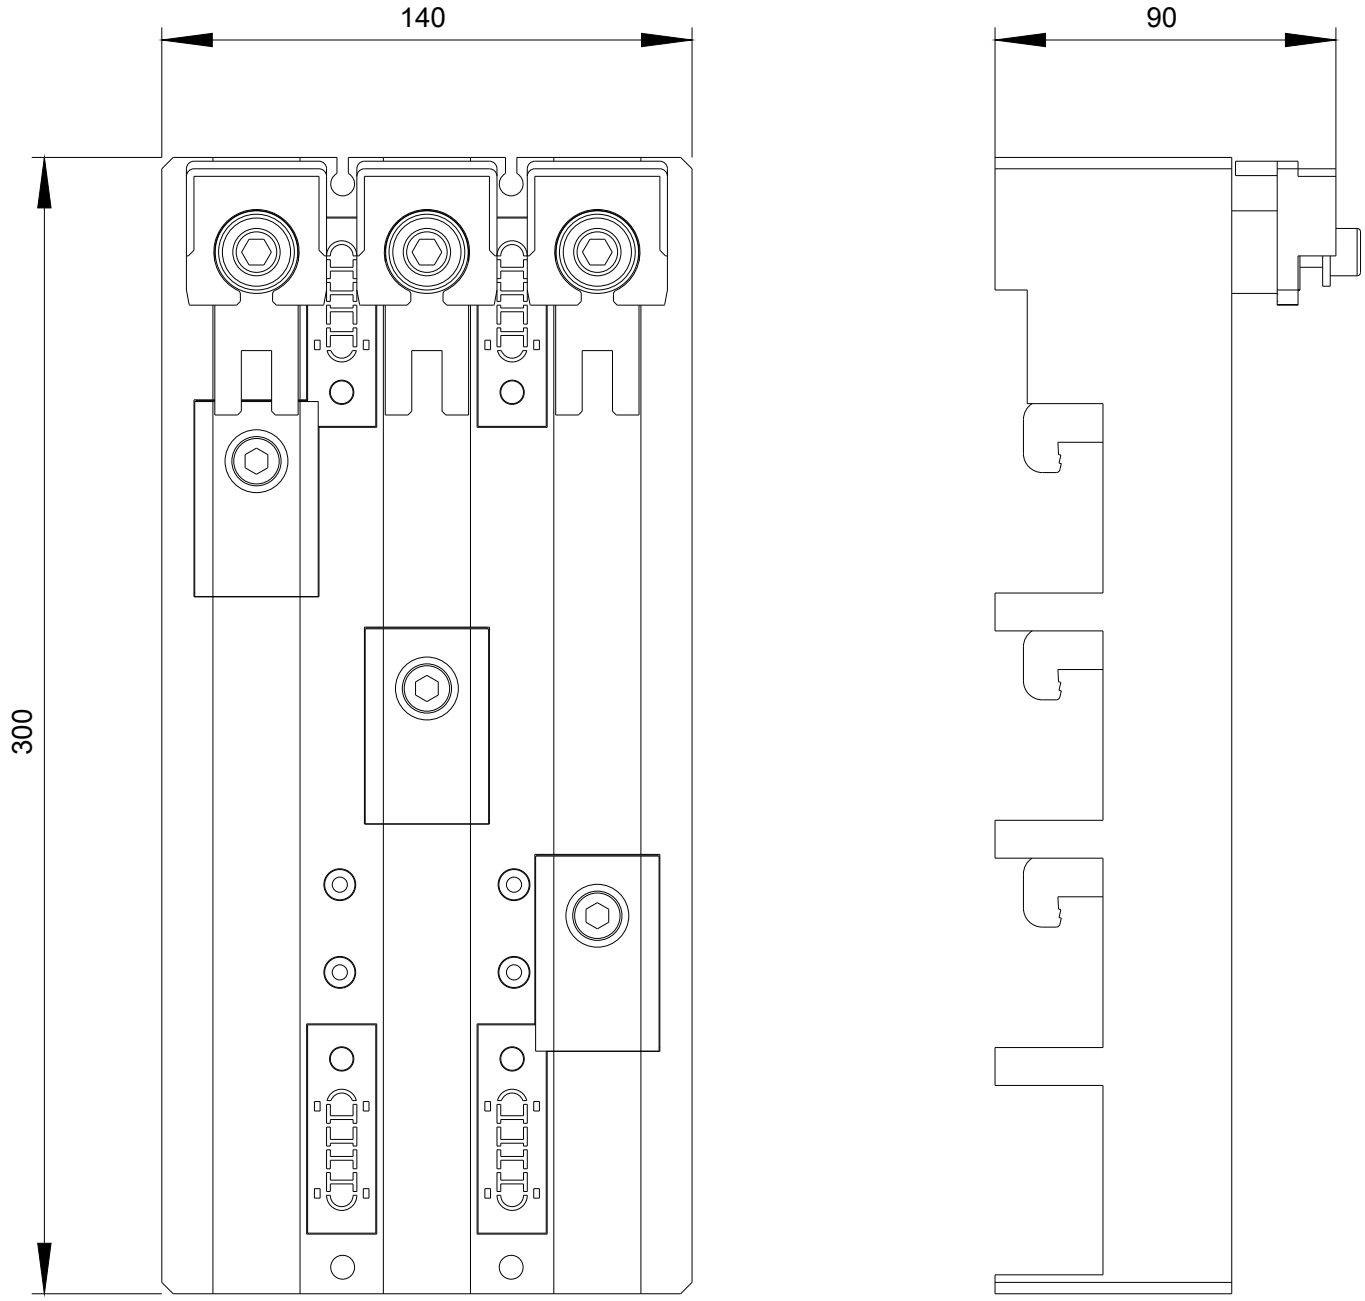

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens