© Siemens AG 2023

Overview



SITRANS Probe LU240 ultrasonic level transmitter, ideal for level, volume, and volume flow measurements. It works with liquids, slurries, and bulk materials up to 12 m (40 ft).

Benefits


- Continuous level measurement up to 12 m (40 ft) range
- Easy installation and simple startup
- Programming using 4-button HMI or SIMATIC PDM
- Communication using HART
- ETFE or PVDF transducers for chemical compatibility
- Process Intelligence signal processing
- Auto False Echo Suppression for fixed obstruction avoidance
- Low power and current startup
- Optional Bluetooth configuration and monitoring via SITRANS mobile IQ

Application

SITRANS Probe LU240 is ideal for level monitoring in the water and wastewater industry, chemical storage vessels, and small bulk hoppers.
The range of SITRANS Probe LU240 is 3, 6, or 12 m (10, 20, or 40 ft). Probe LU240 provides unmatched reliability, using Process Intelligence, Auto False Echo Suppression for fixed obstruction avoidance, and accuracy of 0.15 % of range or 6 mm (0.25 inch) (on 6 m and 12 m models only).
SITRANS Probe LU240 offers HART communication on certain models and mA output on all models.
SITRANS mobile IQ is a Bluetooth app that provides an intuitive interface to quickly configure, set up, and monitor SITRANS Probe LU240 series (available for Android, Apple, and Windows devices). For more information: http://www.siemens.com/mobileIQ.
The transducer on the Probe LU240 is available as ETFE or PVDF to suit the chemical conditions of your application. As well, for applications with varying material and process temperatures, Probe LU240 incorporates an internal temperature sensor to compensate for temperature changes.

- Key Applications: chemical storage vessels, filter beds, liquid storage vessels

Configuration

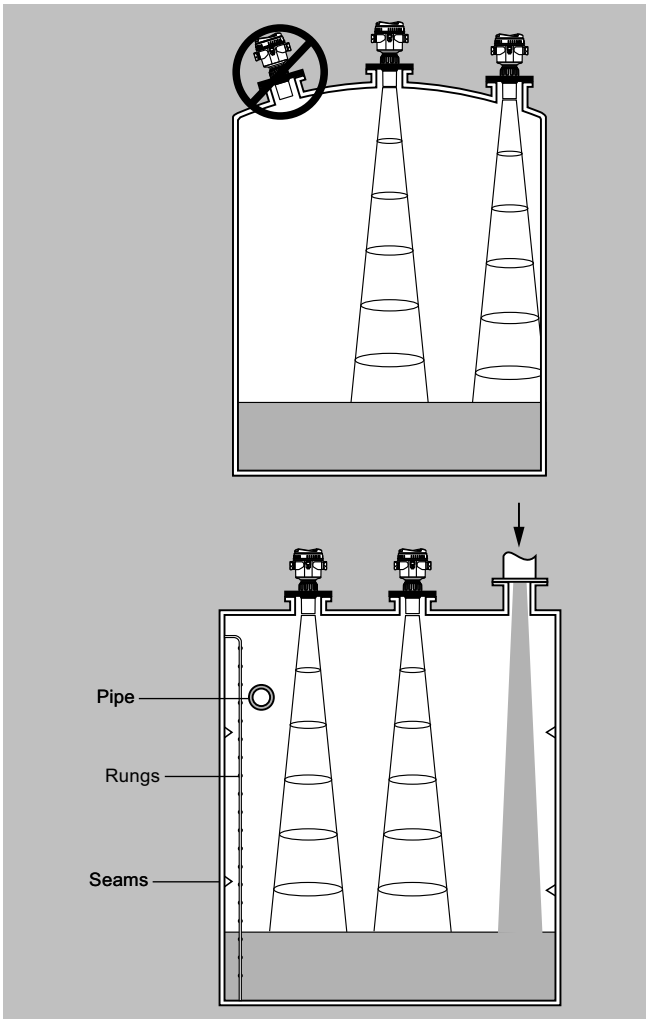

SITRANS Probe LU240 mounting

© Siemens AG 2023

Selection and ordering data

SITRANS Probe LU240 Ultrasonic level transmitter Continuous, non-contact, up to 12 m (40 ft) range. Monitors level, volume, and volume flow (model dependent) in liquids, slurries, and solids. With easy to use quick start wizards.	Article No. 7ML51	1	●	-	●	●	●	0	●	-	4	●	●	●
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.														
Communications														
HART (4 ... 20 mA) level, volume, volume flow[4]			0											
4 ... 20 mA level[5]			7											
Ingress protection														
IP66, IP68, Type 4X, 6					1									
Measurement range/wetted parts														
200 ... 3 000 mm (7.87 ... 118.11 inch), PVDF Copolymer						B								
200 ... 3 000 mm (7.87 ... 118.11 inch), ETFE						C								
200 ... 6 000 mm (7.87 ... 236.22 inch), PVDF Copolymer						D								
200 ... 6 000 mm (7.87 ... 236.22 inch), ETFE						E								
200 ... 12 000 mm (7.87 ... 472.44 inch), PVDF Copolymer						G								
200 ... 12 000 mm (7.87 ... 472.44 inch), ETFE						H								
Process connection														
2" NPT [(Taper), ASME B1.20.1]							D							
R 2" [(BSPT), EN 10226]							E							
G 2" [(BSPP), EN ISO 228-1]							F							
Non-wetted parts														
Plastic (PBT/PC material)									7					
Type of protection														
Ordinary Locations/General Purpose (Non-Ex), $_{C}CSA_{US}$, CE, UKCA, KC, RCM, EAC												A		
Ordinary Locations/General Purpose (Non-Ex), $_{C}CSA_{US}$, FM, CE, UKCA, KC, RCM, EAC[1]												B		
Ex i (ia) (Ex-Zone 0/Div. 1)/IS, FM NI (Class I, Div. 2)[2]												C		
Electrical connections/cable entries														
2 x M20 x 1.5 (one general purpose Polyamide cable gland and one Polyamide blocking plug provided)													F	
1 x 1/2" NPT (no gland cable provided)													K	
For custom electrical connections/cable entries, contact a local sales person. For more information please visit: http://www.automation.siemens.com/aspa_app														
Local HMI														
Without display (blind lid of PBT/PC material)														0
With display (blind lid of PBT/PC material)														1
With display (clear lid of PC material)														3

Selection and Ordering data	Order code
Further designs	
Please add "**-Z**" to Article No. and specify Order code(s).	
Stainless steel tag [13 x 45 mm (0.5 x 1.75 inch)]: Measuring-point number/identification (max. 32 characters) specify in plain text	**Y15**
Certificates	
Declaration of compliance 2.1 (EN 10204) - delivery meets order requirements	**C19**
Certificate EN 10204-2.2	**C14**
Wireless communication	
Bluetooth[6]	**F50**
Approvals [3]	
ATEX II 1G Ex ia IIC T4 Ga, Ta = -40 °C to +80 °C; UKEX II 1G Ex ia IIC T4 Ga, Ta = -40 °C to +80 °C; IECEx Ex ia IIC T4 Ga, Ta = -40 °C to +80 °C; EAC Ex 0Ex ia IIC T4 Ga, IP67/IP68; SABS Ex ia IIC T4 Ga, Ta = -40 °C to +80 °C	**E31**
FM non-incendive - Class I, Div. 2, Groups A, B, C, D T5 (Ta = 80 °C), T6 (Ta = 40 °C)[1]	**E32**
NEPSI, KCs, IECEx - Ex ia IIC T4 Ga	**E33**
$_{C}CSA_{US}$, KCs, FM - Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G, T4, INMETRO, IECEx - Ex ia IIC T4 Ga[1]	**E34**

© Siemens AG 2023

Selection and ordering data (continued)

Selection and Ordering data	Order code
For customs, contact a local sales person. For more information please visit http://www.automation.siemens.com/aspa_app.	

Spare parts and accessories	Article No.
Operating Instructions	
All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation	
Accessories	
Tag, stainless steel, 12 x 45 mm, one text line (max. 16 characters)	**7ML1930-1AC**
Stainless steel FMS200 universal box bracket mounting kit	**7ML1830-1BK**
3" ASME/DIN Universal mounting adapter, 2" NPT, ETFE	**7ML1830-1BT**
3" ASME/DIN Universal mounting adapter, 2" BSP, ETFE	**7ML1830-1BU**
2" NPT nylon plastic locknut	**7ML1830-1DT**
2" BSP nylon plastic locknut	**7ML1830-1DQ**
Over-voltage protection up to 6 kV (external), M20 x 1.5	**7MF7903-7AB**
Over-voltage protection up to 6 kV (external), ½" NPT	**7MF7903-7AC**
Cable Gland Polyamide - General Purpose (-20 ... +60 °C)	**A5E34457564**
Bluetooth kit	**A5E50514198**
SITRANS LT500, a versatile, single and multi-vessel level monitor/controller for virtually any application in a wide range of industries.	**7ML60..-.....-....**
Spare Parts	
Spare lid, clear	**A5E44267491**
Spare lid, blind	**A5E44267497**
Spare o-ring for lid	**A5E44267501**
Spare segmented display and 4-button HMI	**A5E44809382**

[1] Available only with Electrical connections/cable entries option K only.
[2] Available only with order codes E31, E32, E33, and E34.
[3] Order codes E31, E32, E33, E34 only available with Type of protection option C.
[4] Available only with Measurement range/wetted parts options D, E, G, and H.
[5] Available only with Measurement range/wetted parts options B and C.
[6] Available only with Type of protection options A and B.

Technical specifications

SITRANS Probe LU240	
Mode of operation	
Measuring principle	Ultrasonic level measurement
Typical application	Level measurement in storage vessels and simple process vessels
Inputs	
Measuring range	
• 3 m (10 ft)	0.2 ... 3 m (8 inch ... 10 ft)
• 6 m (20 ft) model	0.2 ... 6 m (8 inch ... 20 ft)
• 12 m (40 ft) model	0.2 ... 12 m (8 inch ... 40 ft)
Frequency	54 kHz
Outputs	
mA/HART	
• Range	4 ... 20 mA
• Accuracy	± 0.0096 mA
• HART version	7
• Startup current	3.6 mA
• Fail-safe	Programmable as high, low, or hold (loss of echo) per NAMUR NE43

Technical specifications (continued)

SITRANS Probe LU240	
Performance	
Resolution	≤ 3 mm (0.12 inch)
Accuracy	
3 m (10 ft) version	10 mm (0.39 inch)
6 m (20 ft), 12 m (40 ft) version	• ± the greater of 0.15 % of range or 6 mm (0.25 inch) [valid from 0.25 m (0.82 ft)] • ± 2 mm (0.08 inch) on ranges 4 m (13 ft) or less
Non-repeatability	≤ 3 mm (0.12 inch)
Blanking distance	0.2 m (0.66 ft)
Update time	≤ 4 s
Temperature compensation	Built-in to compensate over temperature range
Beam angle	10°
Rated operating conditions	
Ambient conditions	
• Location	Indoor/outdoor
• Ambient temperature	• Storage: -40 ... +85 °C (-40 ... +185 °F) • Operating: -40 ... +80 °C (-40 ... +176 °F)
• Relative humidity/ingress protection	Suitable for outdoor


© Siemens AG 2023

Technical specifications (continued)

SITRANS Probe LU240	
• Installation category	I
• Pollution degree	4
Medium conditions	
• Temperature at flange or threads	-40 ... +85 °C (-40 ... +185 °F)
• Pressure (vessel)	0.5 bar g (7.25 psi g)
Display	-20 ... +80 °C (-4 ... +176 °F)
Design	
Material (enclosure)	PBT (Polybutylene Terephthalate)
Degree of protection	Type 4X, Type 6, IP66, IP68
Weight	0.93 kg (2.1 lb)
Cable inlet	2 x M20 x 1.5 cable gland or 1 x ½" NPT thread
Material (transducer)	ETFE (Ethylene Tetrafluoroethylene) or PVDF (Polyvinylidene Fluoride) Buna-N seal
Process connection	
Threaded connection	2" NPT [(Taper), ASME B1.20.1] R 2" [(BSPT), EN 10226] or G 2" [(BSPP), EN ISO 228-1]
Flange connection	3 inch (80 mm) universal flange
Other connection	FMS 200 mounting bracket (see FMS mounting bracket product page for more information) or customer supplied mount.
Display and Controls	
Interface	Local: LCD display Remote: Available via HART or Bluetooth
Configuration	4-button HMI
Memory	Non-volatile EEPROM, no battery required
Power supply	
4 ... 20 mA/HART	10.5 ... 30 V DC
Certificates and Approvals	
General	FM, $_{C}$CSA$_{US}$, CE, UKCA, RCM, EAC, KC, VLAR-EM II
Hazardous	
• Intrinsically Safe	
- Europe	ATEX II 1G Ex ia IIC T4 Ga
- UK	UKEX II 1G Ex ia IIC T4 Ga
- International	IECEx SIR 18.0013X Ex ia IIC T4 Ga
- USA/Canada	FM/$_{C}$CSA$_{US}$ Class I, Div. 1, Groups A, B, C, D, Class II, Div. 1, Groups E, F, G, Class III T4
- Brazil	INMETRO Ex ia IIC T4 Ga
- China	NEPSI Ex ia IIC T4 Ga
- South Africa	SABS Ex ia IIC Tx Ga
- Russia	EAC Ex 1G Ex ia IIC T4 Ga
- Korea	KCs Ex ia IIC T4
• Non-incendive	
- USA	FM, Class I, Div. 2, Groups A, B, C, D Tx
Metrological	MCERTS, CPA, Kazakhstan patterna approval
Radio (Bluetooth)	USA, Canada, EU, China

© Siemens AG 2023


Options

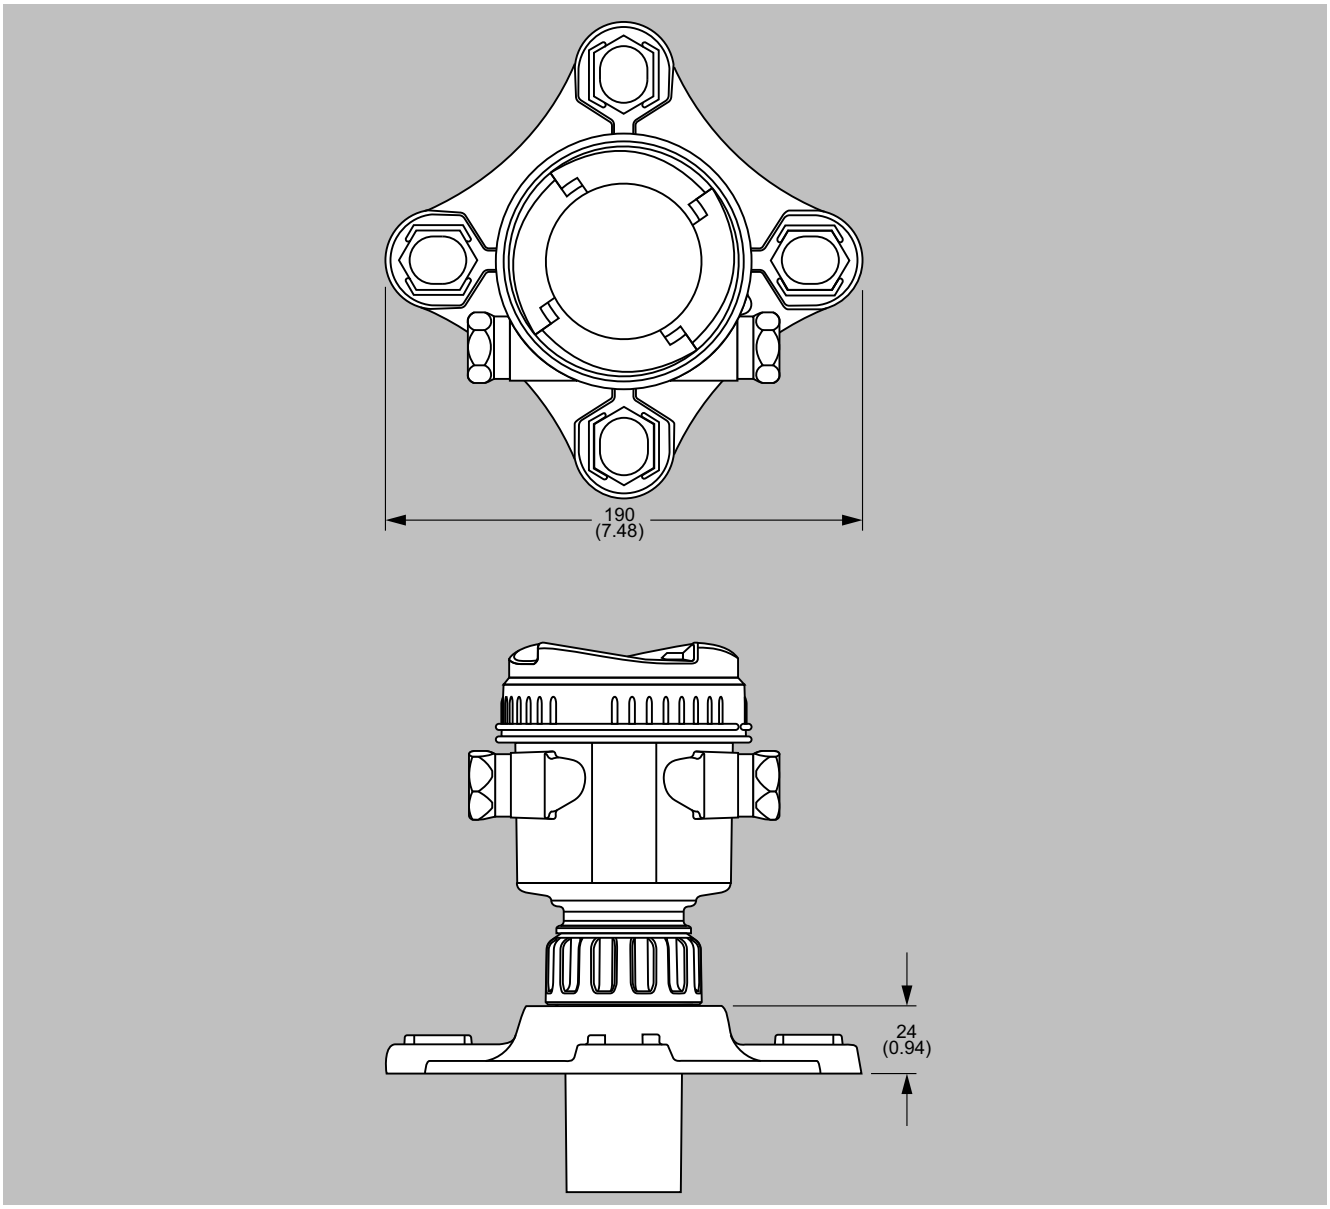

SITRANS Probe LU240 optional flange adapter, dimensions in mm (inch)

© Siemens AG 2023


Options (continued)

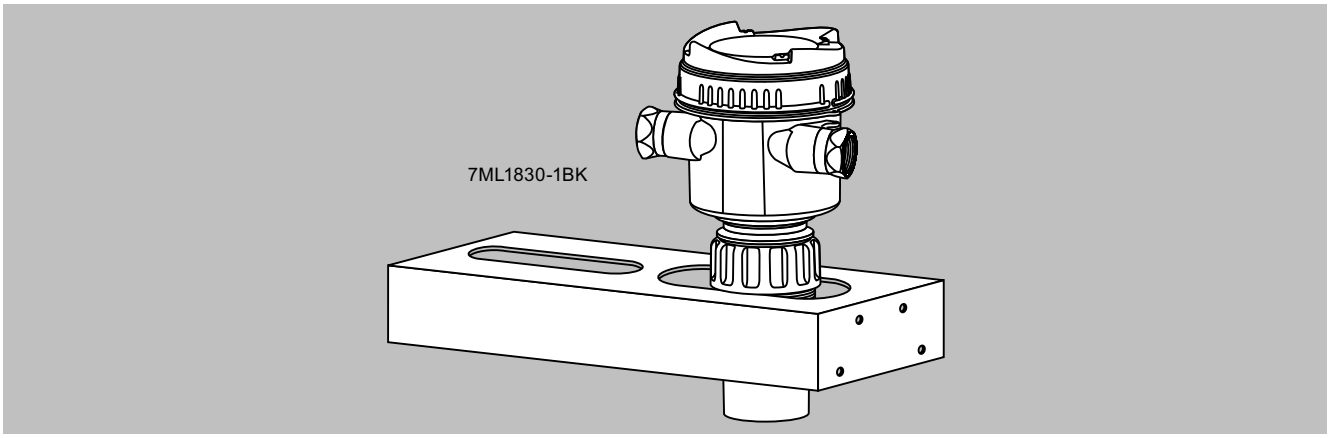

SITRANS Probe LU240 with optional FMS 200 universal box bracket

© Siemens AG 2023


Dimensional drawings

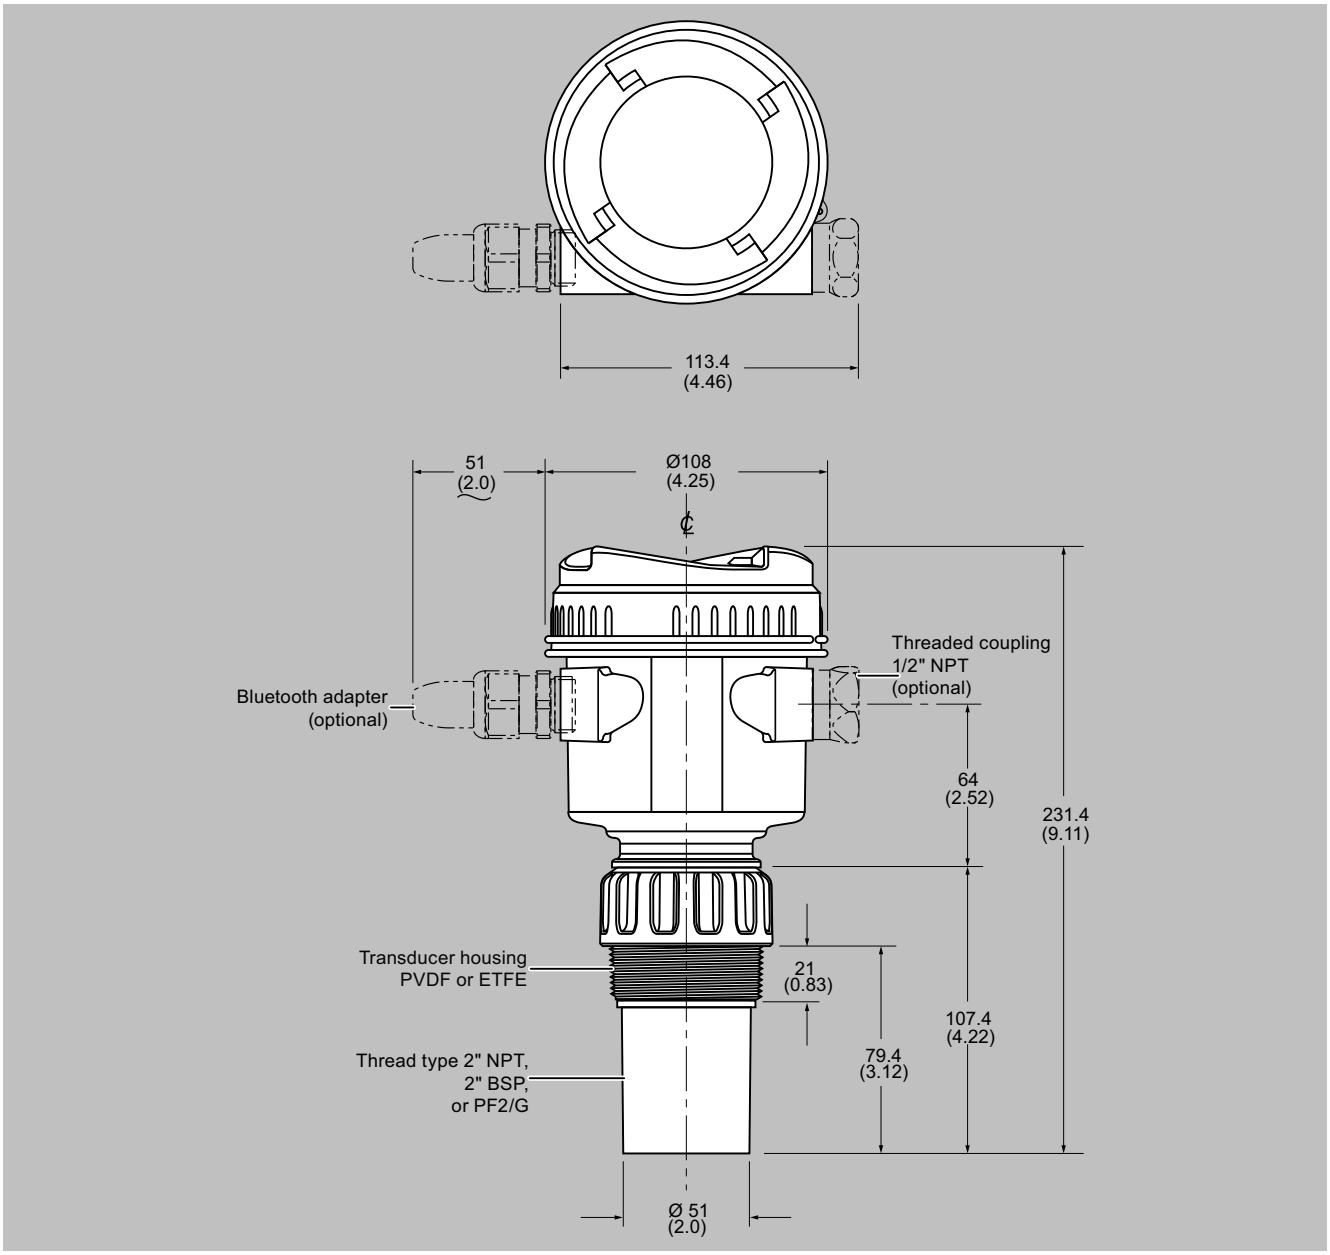

SITRANS Probe LU240 with optional Bluetooth adapter, dimensions in mm (inch)

© Siemens AG 2023

Circuit diagrams

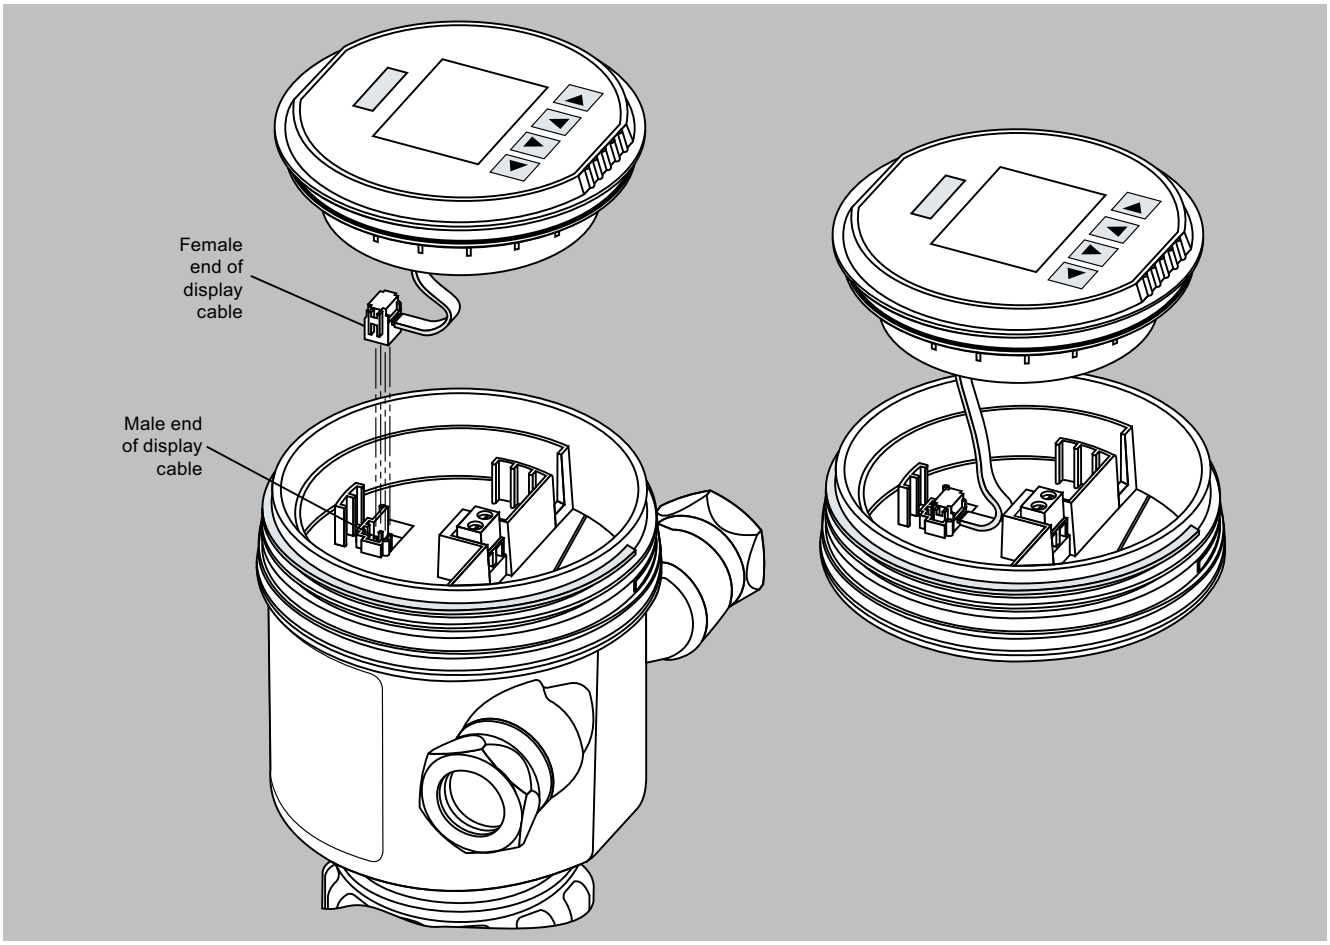

SITRANS Probe LU240 connections