
SIEMENS

Product data sheet 4NC5325-2CE20

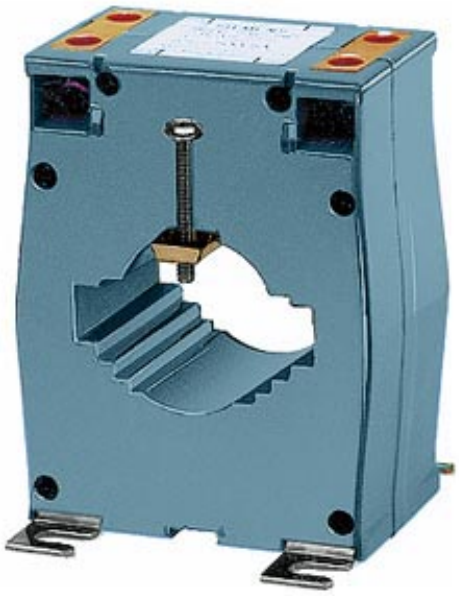

Similar to image

WINDOW-TYPE CURRENT TRANSFORMER,
CLASS 1 400A/5A,
5VA PRIMARY CURRENT 400A, 5VA

General technical details:		
product designation		window-type current transformers
Accuracy class / of the current transformer		class 1
Ratio input current/output current		400/5 A
Current		
• at the input / rated value	A	400
• secondary side / rated value	A	5
Operating apparent output / rated value	V·A	5
Ambient temperature		
• during operating	°C	-10 … +55
Item designation		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		T
• according to DIN EN 61346-2		T

Mechanical design:		
Width / of the push-through bus bar		
• in case of 1 bus bar / maximum	mm	50
• in case of 2 bus bars / maximum	mm	40
Outer diameter / of the push-through conductor / maximum	mm	36

subject to modifications
© Copyright Siemens AG 2013

Protection class IP		IP20
Depth	mm	80
Height	mm	98
Width	mm	82.5
Type of mounting		screw fixing
Design of the electrical connection / secondary side		screw-type terminals
Product equipment / touch-protection		Yes

Certificates/approvals:

General Product Approval	Declaration of Conformity





Further information:

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/4NC5325-2CE20/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=4NC5325-2CE20

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
Datanorm GAEB81 GAEB83 RTF TXT

last change: Dec 17, 2012

© Copyright Siemens AG 2013