SIEMENS

Data sheet 8US1213-4AH00



busbar adapter 60 mm SYS. UL 508 Busbar system 60 mm Bar thickness: TT profile UL rating 240-600V/540A Can be used in spring circuits for 3VL circuit breaker with pipe contacting for cable outlet top/bottom Adapter length 296 mm Adapter width 140 mm for VL400 UL, JG-FRAME for VL400X UL, LG-FRAME

Model	
product brand name	SENTRON
Product designation	Device adapter
Design of the product	Accessories
Operating current / at AC / rated value	400 A
Operating voltage / at AC / rated value	690 V
suitability for use	3VL400 UL JG FRAME and 3VL400X UL LG FRAME

Connections	
Type of connectable conductor cross-sections / for copper conductor / stranded	Tubular contacts

Mechanical Design	
Width	140 mm
length	296 mm
Busbar center-to-center spacing	60 mm
net weight	2 466 g

Certificates

Subject to change without notice
© Copyright Siemens

General Product Approval				Declaration of Conformity	Test Certificates
CSA	UL	UR		EG-Konf.	Special Test Certificate

Test Certificates	Shipping Approval			other
Miscellaneous	ABS	PRS	RINA	Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1213-4AH00


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/8US1213-4AH00

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1213-4AH00

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

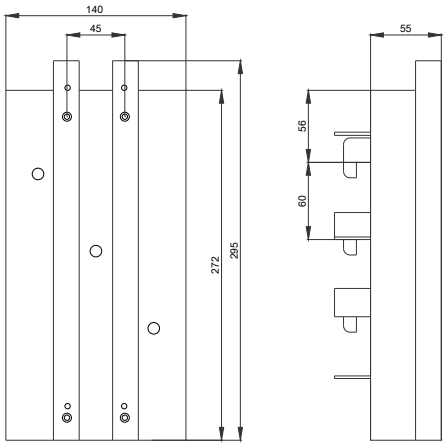

Subject to change without notice
© Copyright Siemens