SIEMENS

HJXD63B250

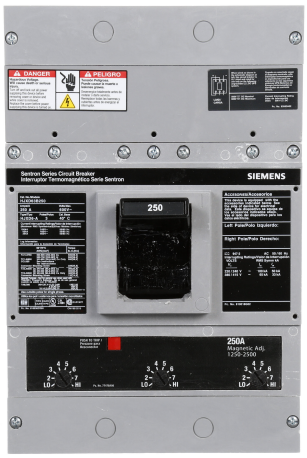

Documents

Cut Sheets 1

Cut Sheets 2

Adjustable Parameters

Adjustable pick-up value current / of instantaneous short-circuit trip unit / Full-scale value	2500 A
Adjustable pick-up value current / of instantaneous short-circuit trip unit / initial value	1250 A

Certificates

Certificate of suitability	UL489 / IEC 60947-2

Connections

Type of electrical connection / for main current circuit	VARIED CONNECTION ACCESSORIES

Electricity

Continuous current / rated value	250 A

Environmental Conditions

Ambient temperature / during operation / minimum	-25 degC
Ambient temperature / during operation / maximum	75 degC

General Technical Data

Operating voltage / rated value / maximum	600 V

Mechanical Design

Size of the circuit-breaker	JD (400A)
Height [in]	11 in
Width [in]	7.5 in
Depth [in]	4 in

Model

Number of poles	3
Product designation	MOLDED CASE CIRCUIT BREAKER
Product sub brand name	SENTRON

Protective function of the overcurrent release	LI
Suitability for use	OVERLOAD AND SHORT CIRCUIT LINE PROTECTION
Design of the product	JD
Design of the overcurrent release	THERMAL - MAGNETIC
Product brand name	SIEMENS

Switching Capacity According To Ul 489

Trip class	HIGH
Maximum short-circuit current breaking capacity (Icu) / at 480 V / acc. to NEMA / rated value	65 kA
Maximum short-circuit current breaking capacity (Icu) / at 600 V / acc. to NEMA / rated value	35 kA
Maximum short-circuit current breaking capacity (Icu) / at 240 V / acc. to NEMA / rated value	100 kA

Installation and Maintenance Guide 3

Delivery Information

Export Control Class	AL : N / ECCN : EAR99
Net Weight	18.55
Product_Dimensions (LxWxH)	40.0X40.0X40.0

Information and Instruction 4

Additional Product Information

Country of Origin	MX, US
Commodity Code	8536200020
RoHS Compliance	*DQ

Product Selector Information

AC Interrupt Rating @ (kA)	System Voltage = 240V and Interrupt rating = 100 | System Voltage = 480V and Interrupt rating = 65 | System Voltage = 600V and Interrupt rating = 35
Frame Amps	400
DC Interrupt Rating @ (kA)	System Voltage = 500V and Interrupt

	rating = 35
Trip Amps	250
Poles	3
% Rated	80
Trip Type	Thermal Magnetic