SIEMENS

Data sheet 3WA9111-0AF05

Accessory 3WA/3WL Charging Motor (M) 110-127 V AC / 110-125 V DC

Model	
product brand name	SENTRON
product designation	Motorized operating mechanism
design of the product	MO spring charging motor
type of the driving mechanism	motorized operating mechanism
operating apparent power [VA]	135 VA
electrical endurance (operating cycles)	25 000
operating frequency maximum	60 1/h
time for clamping of the spring energy store with control supply voltage (Us)	10 s
control supply voltage at DC rated value maximum	125 V
design of the DIAZED fuse link gG for short-circuit protection minimum permissible	2 A
ambient temperature during operation	
• minimum	-40 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	80 °C

Approvals Certificates


General Product Approval				EMV	Test Certificates
CE EG-Konf.	UKCA	Confirmation	EAC	RCM	Type Test Certificates/Test Report


Test Certificates		Marine / Shipping	other	Dangerous Good	
Miscellaneous	Special Test Certificate	Lloyd's Register LRS	Confirmation	Transport Information	Dangerous Goods Information

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AF05
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AF05
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AF05
CAx-Online-Generator
http://www.siemens.com/cax
Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

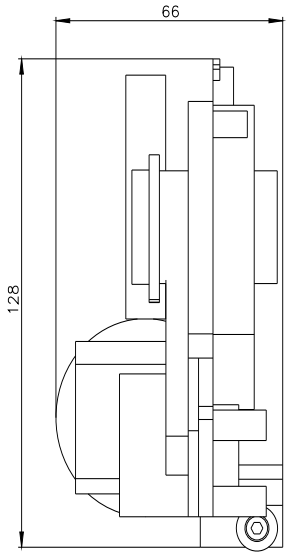

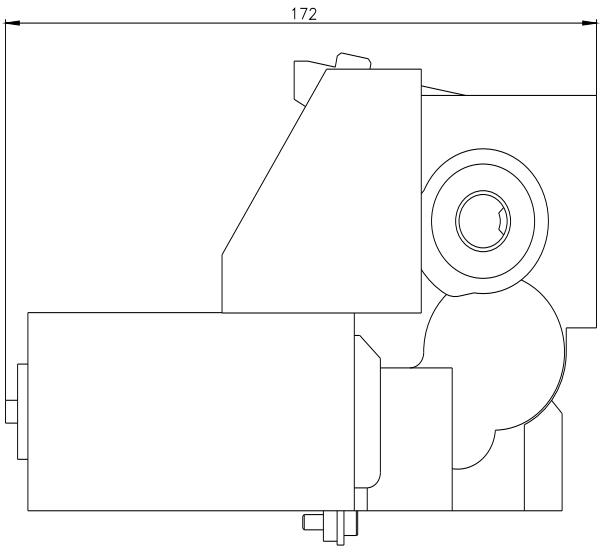

last modified: 2/8/2023

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens