
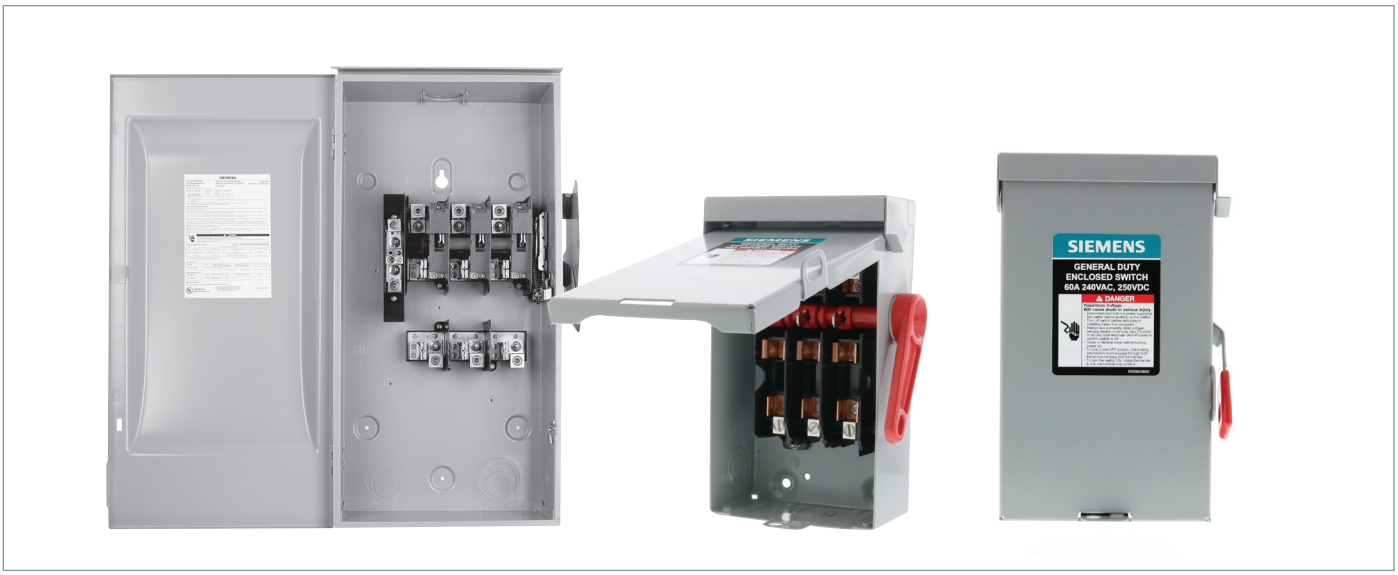


System	Ampere Rating	Indoor — Type 1 Catalog Number	Indoor — Type 1 Ship Wt. (lbs.) Std. Pkg	Outdoor — Type 3R Catalog Number	Outdoor — Type 3R Ship Wt. (lbs.) Std. Pkg	Horsepower Rating① 240V AC 1-Phase, 2-Wire Std.	1-Phase, 2-Wire Max.	2-Phase, 4-Wire Std.	2-Phase, 4-Wire Max.	3-Phase, 3-Wire Std.	3-Phase, 3-Wire Max.	250 Volt DC Std.


240 Volt Fusible

2-Pole, 2-Fuse, and Solid Neutral②③④ — 240 Volt AC/250 Volt DC



	30	GF221NA	30⑦	GF221NRA⑤	30⑦	1½	3	—	—	3	7½	5
	60	GF222NA	20⑥	GF222NRA⑤	20⑥	3	10	—	—	7½	15	10
	100	GF223N	23	GF223NR	23	7½	15	—	—	15	30	20
	200	GF224N	47	GF224NR	48	15	—	—	—	25	60	40

3-Pole, 3-Fuse, and Solid Neutral④ — 240 Volt AC/250 Volt DC



	30	GF321NA	30⑦	GF321NRA⑤	30⑦	1½	3	—	—	3	7½	5
	60	GF322NA	20⑥	GF322NRA⑤	20⑥	3	10	—	—	7½	15	10
	100	GF323N	25	GF323NR	25	7½	15	—	—	15	30	20
	200	GF324N	49	GF324NR	50	15	—	—	—	25	60	40
	400	GF325NA	94.6	GF325NRA	94.6	15	—	—	—	50	125	50
	600	GF326NA	95.6	GF326NRA	95.6	15	—	—	—	75	200	—

240 Volt Non-Fusible③④

2-Pole or 3-Pole — 240 Volt AC/250 Volt DC



	30	GNF221A	20⑦	GNF221RA⑤	20⑦	—	3	—	—	—	—	5
	30	GNF321A⑨	20⑦	GNF321RA⑤⑨	20⑦	—	3	—	—	7½	—	5
	30	GNF321LA⑩	30⑦	GNF321RLA⑤⑩	30⑦	—	3	—	—	7½	—	5
	60	GNF222A	30⑦	GNF222RA⑤	30⑦	—	10	—	—	15	—	10
	60	GNF322A	30⑦	GNF322RA⑤	30⑦	—	10	—	—	15	—	10
	100	GNF323	23	GNF323R	24	—	15	—	—	30	—	20
	200	GNF324	46	GNF324R	47	—	15	—	—	60	—	40
	400	GNF325A	114	Use 600V Switch — **HNF365RA**		—	15	—	—	125	—	50
	600	GNF326A	116	Use 600V Switch — **HNF366RA**		—	15	—	—	200	—	—

① Dual horsepower ratings: Std.- applies when non-time delay fuses are installed. Max.- applies when time-delay fuses are installed.
② These switches are UL-listed for application on grounded B-phase systems.
③ Suitable for use on 3-phase motor loads.
④ Service entrance labeled.
⑤ Has provision for ECHA type hub.
⑥ 5 switches per standard package.
⑦ 10 switches per standard package.
⑧ Height reduced switch (45.25 rather than 56 inches in height) for use with 500MCM or smaller conductors.
⑨ Not suitable for service entrance.
⑩ Indicates oversized enclosure.