SIEMENS

Data sheet 8US1251-5NT10

Device adapter S0, 32A, for 60 mm busbar system, 45x 260 mm long
special lines welded-on AWG 10, 99 mm long spacer enclosed
Mounting rail screwed on



Model	
product brand name	SENTRON
Product designation	Device adapter
Design of the product	Accessories
Design of support rail	Support rails
Operating current / at AC / rated value	32 A
Operating voltage / at AC / rated value	690 V
suitability for use	S0

Connections	
Type of connectable conductor cross-sections / for copper conductor / stranded	AWG 10

Mechanical Design	
Width	45 mm
length	260 mm
Busbar center-to-center spacing	60 mm
net weight	334.5 g

Certificates

Subject to change without notice
© Copyright Siemens

General Product Approval				Declaration of Conformity
CSA	UR	UL		EG-Konf.

Miscellaneous

Test Certificates			Shipping Approval		
Special Test Certificate	Type Test Certificates/Test Report	Miscellaneous	ABS	BUREAU VERITAS	LRS

Shipping Approval			other	Railway
PRS	RINA	RMRS	Miscellaneous	Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1251-5NT10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/8US1251-5NT10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1251-5NT10

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

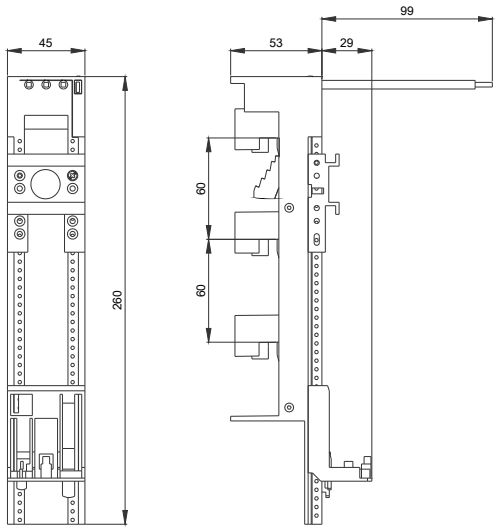

© Copyright Siemens

Subject to change without notice
© Copyright Siemens