SIEMENS

Data sheet 3UF7901-0AA00-0



Figure similar

Memory module for the parameterization of SIMOCODE proS/pro V without PC/PG, Color: light gray

General technical data	
product designation	memory module
design of the product	For SIMOCODE pro V PROFINET
ambient temperature	
• during storage	-40 ... +80 °C
• during operation	-25 ... +60 °C
• during transport	-40 ... +80 °C

Certificates/ approvals

General Product Approval	EMV	Test Certificates
CE EG-Konf. UKCA EAC RCM	KC	Type Test Certificates/Test Report

Maritime application	other		Environment	Industrial Communication
ABS RMRS	产品合格 QC PASS	Confirmation	Environmental Confirmations	Profibus

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7901-0AA00-0
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7901-0AA00-0
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3UF7901-0AA00-0
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7901-0AA00-0&lang=en

Subject to change without notice
© Copyright Siemens

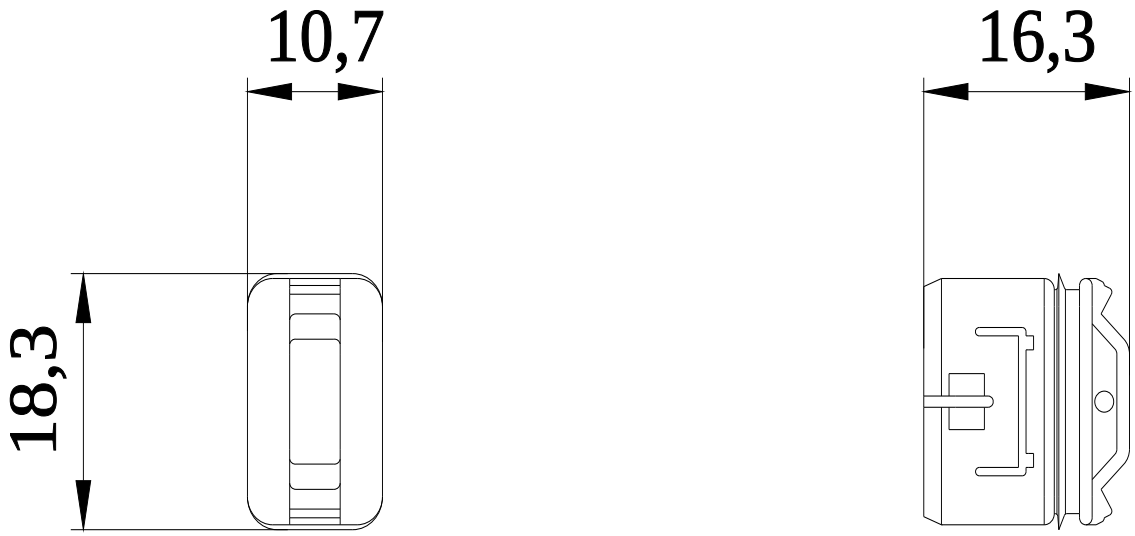



Subject to change without notice
© Copyright Siemens



Subject to change without notice
© Copyright Siemens