SIEMENS

Show actual product details

Data sheet 3VA9243-0JJ13

WIRE CONNECTOR LARGE 3 PCS. ACCESSORY FOR: 3VA6 150/250



Connections according IEC	
Connectable conductor cross-section	
• for copper cable / finely stranded / maximum	185 mm²
• for copper cable / stranded / maximum	240 mm²
• for aluminum cable / stranded / maximum	240 mm²
• for aluminum cable / stranded / minimum	25 mm²
Wire stripping length	30.5 mm
Tightening torque	
• at usage of copper-cables / multi-stranded	31 Nm
• at usage of copper-cables / finely stranded	31 Nm
Connetctions according UL	
Wire stripping length	1.2 in
Connectable conductor cross-section	
• for copper-cable / multi-stranded / minimum	2 AWG
• for copper-cable / multi-stranded / maximum	350 kcmil
• for copper-cable / finely stranded / minimum	2 AWG
• for copper-cable / finely stranded / maximum	350 kcmil
• for aluminum-cable / multi-stranded / minimum	2 AWG

Subject to change without notice
© Copyright Siemens AG

• for aluminum-cable / multi-stranded / maximum	350 kcmil
Tightening torque / at usage of copper-cables	
• multi-stranded	275 lb-in
• finely stranded	275 lb-in

Certificates

EMC	Declaration of Conformity	other
RCM	EG-Konf.	sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VA9243-0JJ13

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/3VA9243-0JJ13/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9243-0JJ13

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://www.siemens.com/specifications

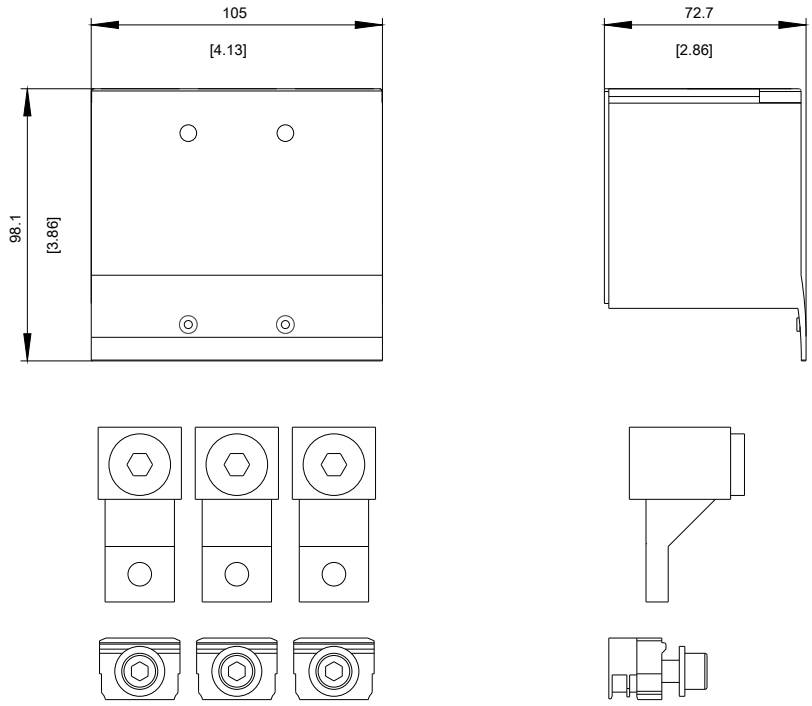

Subject to change without notice
© Copyright Siemens AG

last modified: 11/25/2016

Subject to change without notice
© Copyright Siemens AG