SIEMENS

Data sheet 8US1211-4TR00



busbar adapter 60 mm SYS UL 508 Busbar system 60 mm Bar thickness: 5/10 mm/TT profile UL rating 100A/600V Can be used in spring circuits IEC rating 100 A/690 V for SIRIUS circuit breaker for SIRIUS Size S3 for cable outlet top Cable welded 150° 153mm Adapter length 200 mm Adapter width 72 mm

Model	
product brand name	SENTRON
Product designation	Device adapter
Design of the product	Accessories
Operating current / at AC / rated value	100 A
Operating voltage / at AC / rated value	690 V
suitability for use	SIRIUS S3

Connections	
Type of connectable conductor cross-sections / for copper conductor / stranded	AWG 4

Mechanical Design	
length	215 mm
Busbar center-to-center spacing	60 mm
net weight	650 g

Certificates

Subject to change without notice
© Copyright Siemens

General Product Approval				Declaration of Conformity	Test Certificates
CSA	UR	UL	EAC	EG-Konf.	Special Test Certificate

Test Certificates		Shipping Approval			
Miscellaneous	Type Test Certificates/Test Report	ABS	BUREAU VERITAS	LRS	PRS

Shipping Approval		other	
RINA	RMRS	Miscellaneous	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1211-4TR00

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/8US1211-4TR00

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1211-4TR00

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

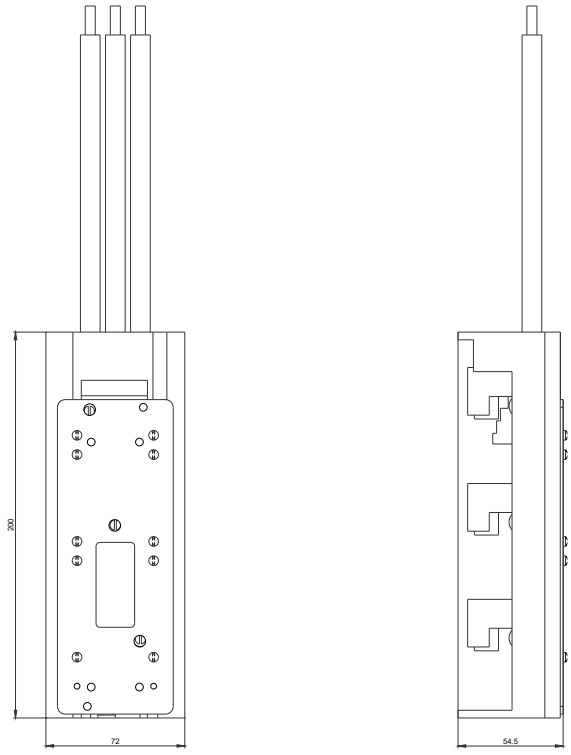

8US1211-4TR00

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens