SIEMENS

Product data sheet 5SM3356-6



Similar to image

RES.CURRENT OP.CIRCUIT BREAKER TYPE A PSE/SSF 63A 3+N-POL IFN 30MA 500V 4MW

Technical data:		
mounting position		any
Height	mm	90
Width	mm	36
Depth	mm	70
Design of the product		Instantaneous
Supply voltage / for AC / rated value	V	500
Resistance against the impulse current / rated value	kA	1
Ambient temperature	°C	-25 … +45
Ambient temperature		
• during storage	°C	-40 … +75
Mechanical operating cycles as operating time / typical		10,000
Overvoltage class		III
Supply voltage / for testing equipment / minimum	V	195
Protection against electrical shock		Finger and back-of-hand safe
Position / of power supply cord		top or bottom
Tightening torque		
• with screw-type terminals	N·m	2.5 … 3
Section de conducteur raccordable		

subject to modifications
© Copyright Siemens AG 2013

• solid	mm²	1.5 … 25
• multibrin	mm²	1.5 … 25
Product feature		
• [not supplied - silicon-free]		Yes
• halogen-free		Yes
Number of test cycles / for environmental testing / in accordance with IEC 60068-2-30		28
Device tag		
• according to DIN EN 61346-2		F
• according to DIN EN 81346-2		F

Certificates/approvals:

General Product Approval	other
GOST	Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs


Industry Mall (Online ordering system)
http://www.siemens.com/lowvoltage/mall


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/5SM3356-6/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SM3356-6

CAx-Online-Generator
http://www.siemens.com/cax

© Copyright Siemens AG 2013

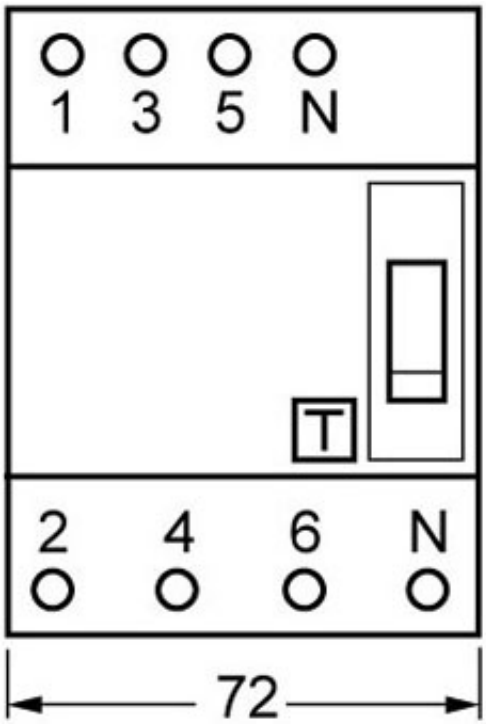

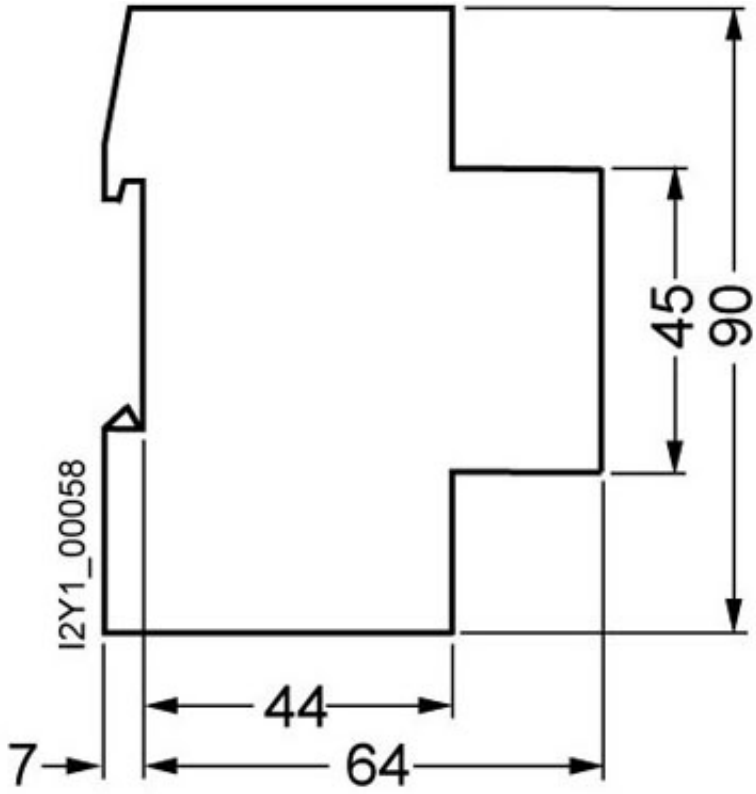

last change: Mar 4, 2013

© Copyright Siemens AG 2013