SIEMENS

HPXD63B160

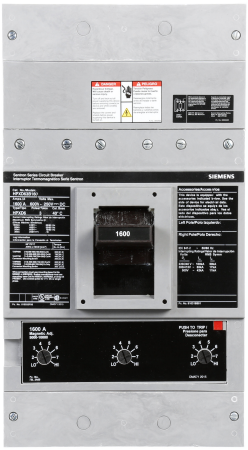

Documents

Others 1

Information and Instruction 2

Adjustable Parameters

Adjustable pick-up value current / of instantaneous short-circuit trip unit / Full-scale value	10000 A
Adjustable pick-up value current / of instantaneous short-circuit trip unit / initial value	5000 A

Certificates

Certificate of suitability	UL489 / IEC 60947-2

Connections

Type of electrical connection / for main current circuit	VARIED CONNECTION ACCESSORIES

Electricity

Continuous current / rated value	1600 A

Environmental Conditions

Ambient temperature / during operation / minimum	-25 degC
Ambient temperature / during operation / maximum	75 degC

General Technical Data

Operating voltage / rated value / maximum	600 V

Mechanical Design

Height [in]	16 in
Width [in]	9 in
Depth [in]	6.19 in
Size of the circuit-breaker	PD (1600A)

Model

Protective function of the overcurrent release	LI
Suitability for use	OVERLOAD AND SHORT CIRCUIT

	LINE PROTECTION
Design of the product	PD
Design of the overcurrent release	THERMAL - MAGNETIC
Product brand name	SIEMENS
Number of poles	3
Product designation	MOLDED CASE CIRCUIT BREAKER
Product sub brand name	SENTRON

Switching Capacity According To Ul 489

Maximum short-circuit current breaking capacity (Icu) / at 600 V / acc. to NEMA / rated value	50 kA
Maximum short-circuit current breaking capacity (Icu) / at 240 V / acc. to NEMA / rated value	100 kA
Trip class	HIGH
Maximum short-circuit current breaking capacity (Icu) / at 480 V / acc. to NEMA / rated value	65 kA

Cut Sheets 3

Delivery Information

Export Control Class	AL : N / ECCN : EAR99
Net Weight	58.4
Product_Dimensions (LxWxH)	40.0X40.0X40.0

Speed Fax Sections 4

Additional Product Information

Country of Origin	, MX, US
Commodity Code	8536200020
RoHS Compliance	*DQ

Product Selector Information

AC Interrupt Rating @ (kA)	System Voltage = 240V and Interrupt rating = 100 | System Voltage = 480V and Interrupt rating = 65 | System Voltage = 600V and Interrupt rating = 50
Frame Amps	1600
DC Interrupt Rating @ (kA)	System Voltage = 250V and Interrupt

Cut Sheets 5

	rating = 30 | System Voltage = 500V and Interrupt rating = 50
Trip Amps	1600
Poles	3
% Rated	80
Trip Type	Thermal Magnetic

Installation and Maintenance Guide 6

Speed Fax Sections 7