SIEMENS

Data sheet 3WL9111-0AH11-0AA0

accessories circuit breaker 3WL position signal switch f. guide frame, 1st block 3 micro-switches

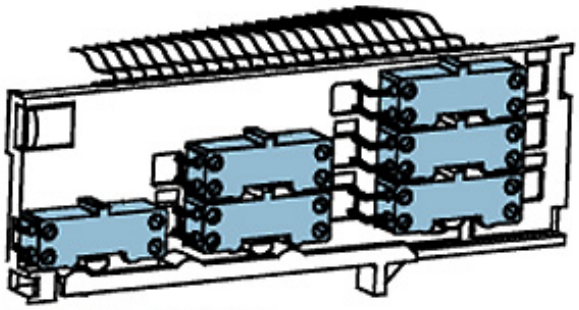

NSE0_00996a

Model	
Product brand name	SENTRON
Design of the product	Accessories
General technical data	
Degree of pollution	3
Voltage	
Insulation voltage	
• at AC / rated value	440 V
• at DC / rated value	250 V
Surge voltage resistance / rated value	4 kV
Supply voltage	
Operating voltage	
• at AC / at 50 Hz / rated value / maximum	250 V
• at DC / rated value / maximum	250 V
Current	
Operating current	
• at A300 (AC) / with test voltage 120 V	6 A

Subject to change without notice
© Copyright Siemens

• at R300 (DC) / with test voltage 120 V	0.22 A
• at A300 (AC) / with test voltage 240 V	3 A
• at R300 (DC) / with test voltage 250 V	0.11 A
• at AC-12 / at 110 V / rated value	10 A
• at AC-12 / at 400 V / rated value	10 A
• at AC-12 / at 24 V / rated value	10 A
• at AC-12 / at 230 V / rated value	10 A
• at AC-15 / at 230 V / rated value	4 A
• at AC-15 / at 400 V / rated value	3 A
• at DC-12 / at 230 V / rated value	0.2 A
• at DC-13 / at 220 V / rated value	0.1 A
• at DC-12 / at 48 V / rated value	2.5 A
• at DC-12 / at 24 V / rated value	10 A
• at DC-13 / at 24 V / rated value	3 A

Certificates

Declaration of Conformity	Test Certificates	Shipping Approval	other		
EG-Konf.	Miscellaneous	RMRS	Environmental Confirmations	Manufacturer Declaration	Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL9111-0AH11-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3WL9111-0AH11-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL9111-0AH11-0AA0

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens